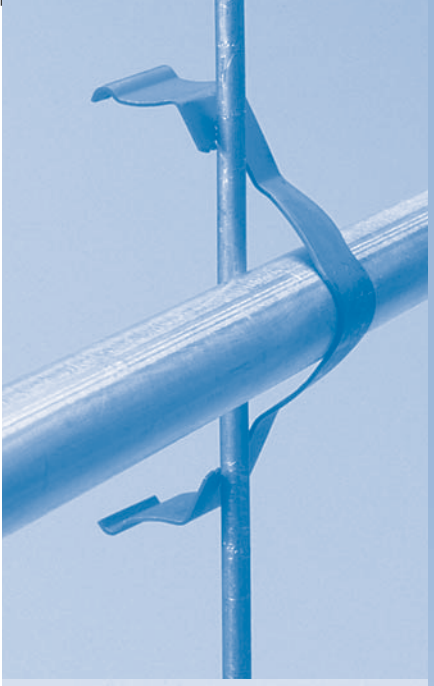

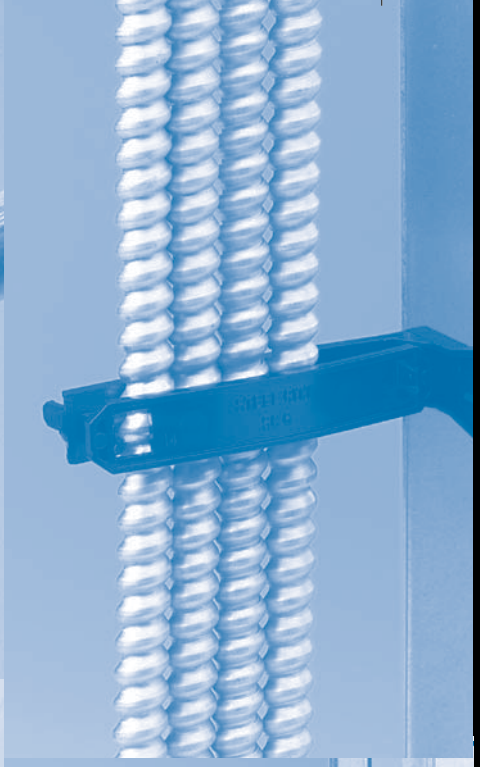

Steel City®

Spring Steel Fasteners

Technical Information F2
Catalog Numbering System F2
Beams & Purlin F3-F8
Hangers F9-F12
Conduit & Cable Supports F13-F24
Stud Wall & Drywall F25-F34
Acoustical Tee F35-F40
Low Voltage/Datacom F41-F46
Fastener Accessories F47-F50
Conduit Hangers, Steel Accessories, Hardware F51-F56
Cross Reference – B-Line F57-F59
Cross Reference – Caddy F60-F61
Cross Reference – Minerallac F62-F63

F

Thomas&Betts

Materials

The following materials are used for Steel City Spring Steel Fasteners:

High Carbon Spring Steel

Spring steel products are manufactured using high carbon, cold rolled steel, AISI C1075 or equivalent. The final part is heat treated to give the formed product great resilience and strength.

Low Carbon Steel

Mild steel products are manufactured using low carbon, cold rolled steel, AISI C1008 or equivalent. Such parts receive a zinc or painted finish to protect the finished product.

Finishes

Zinc Phosphate

The Zinc Phosphate finish is per MIL-SPEC-16232, type Z. This finish includes a Zinc Phosphate base with a supplementary sealant applied. The finished product will withstand 24 to 72 hours of saltspray testing in accordance with ASTM B117.

Pre-Galvanized

Products receiving a Pre-Galvanized finish are Low Carbon Steel products with a coating of Zinc applied to the Steel prior to part fabrication. This finish is in conformance with ASTM A525.

Electro-Galvanized

The Electro-Galvanized finish is a Zinc finish which includes an electro-plated layer of Zinc and then a Zinc Chromate. This finish is applied after fabrication and is in conformance with ASTM B633.

Painted

Some products in the Steel City line receive a Painted finish. Parts are painted for applications which require alternate colors to the standard black Zinc Phosphate (such as which acoustical ceilings).

Load Ratings

The Steel City Spring Steel Fasteners products shown in this catalog have a load limit based on the following:

Static Load Limit

Such products show the load limit which is based on a safety factor of 3.

Ultimate Static Load Limit

Such products show the load limit which is the highest load allowed, with no safety factor.

These Load Limits apply only to catalog numbers which list such a limit. For both instances, the static load limits apply only in the orientation described in the catalog or instruction sheet. These loads apply only to the fastener, the structure to which it will be attached must be evaluated separately.

Individual Part Numbering System

SSF	-	H	A	1/4	T
1		2	3	4	5

1. Catalog numbers will be preceeded by an “SSF” to signify it is a Spring Steel Fastener part and to give it a unique catalog number. Non-Spring Steel Fastening items in this catalog are not preceded by SSF.
2. This portion of the catalog number is a one letter index based on the category the product falls in. For this example, “H” is used for the Hangers category. The following is a list of all the categories and their one letter index:
   - B – Beams and Purlin
   - H – Hangers
   - C – Conduit and Cable
   - S – Stud Wall and Drywall
   - T – Acoustical Tee
   - V – Low Voltage / Telecom
   - M – Miscellaneous
3. This portion of the catalog number references the style in a given category. For this example, “A” is used for the rod and wire hanger with thread impressions.
4. This portion of the catalog number is numeric and will be based on the size or range of sizes the part will fit. For example, the SSF-HA1/4T is a hanger that fits ¼" threaded rod, so the numeric code would be 1/4.
5. A final letter may be but will not always be included after the numeric code. This final letter indicates one of the following:
   - S – the part has an attached stud
   - T – the part has a thread impression
   - A – adjustable

Riveted Combinations

SSF	-	B	V1/4	-	A3/8
1		2	3		4

1. As with the individual parts, riveted combinations will always be preceded by an “SSF” to signify it as a Spring Steel Fastener part.
2. This portion of the catalog number, as with the individual part, is a one letter index based on the category of the product. For this example, “B” is used for the Beams and Purlin category. (See listing above.)
3. Riveted combinations of two parts will have a catalog number constructed from the two individual catalog numbers. This portion of the catalog number references the style and numeric size or range for the first piece of the combination (see #3 and #4 under the Individual Part Numbering System). Note that the first part in the combination will have the same category as the combination. In this example, V1/4 represents a vertical flange or C-purlin clip with an individual catalog number of SSF-BV1/4.
4. This portion of the catalog number references the style and numeric size or range for the second piece of the combination (see #3 and #4 under the Individual Part Numbering System). In this example, the A3/8 represents the rod hanger with an individual catalog number of SSF-HA3/8.

© 2003 Thomas & Betts Corporation. Specifications are subject to change without notice.

Steel City®

Spring Steel Fasteners

Beams & Purlin

Pages F3-F8



Page F4



Page F4



Page F4



Page F4



Page F4



Page F5



Page F5



Page F5



Page F5



Page F6



Page F6



Page F6



Page F6



Page F6



Page F7



Page F7



Page F7



Page F7



Page F8



Page F8

Thomas&Betts





Beam Clamps

Cat. No.	Fig. No.	Description	Static Load Limit	Pkg. Per Box
SSF-BBC	1	Stamped steel beam clamp	100	100
SSF-BBC-S1/2V	2	Beam clamp thru ½" flange to conduit clamp, ½" conduit	25	25
SSF-BBC-S3/4V	2	Beam clamp thru ½" flange to conduit clamp, ¾" conduit	25	25
SSF-BBC-S1V	2	Beam clamp thru ½" flange to conduit clamp, 1" conduit	25	25
SSF-BBC-S1/2H	3	Beam clamp thru ½" flange to side mounted conduit clamp, ½" conduit	15	25
SSF-BBC-S3/4H	3	Beam clamp thru ½" flange to side mounted conduit clamp, ¾" conduit	15	25
SSF-BBC-S1H	3	Beam clamp thru ½" flange to side mounted conduit clamp, 1" conduit	15	25

Features

- ***Fits beam flanges to ½".***
- ***Supports ¼" and ⅜" threaded rod, s-hooks, electrical boxes, conduit and bridle rings.***
- ***¼"-20 or #10-24 threaded openings.***



Fig. 1



Fig. 2



Fig. 3





Beam Clamps

Cat. No.	Fig. No.	Description	Static Load Limit	Pkg. Per Box
SSF-BBC-C1/2 3/4V	4	Beam clamp thru ½" flange to conduit clamp, ½"- ¾" conduit	100	25
SSF-BBC-C1V	4	Beam clamp thru ½" flange to conduit clamp, 1" conduit	100	25
SSF-BBC-C1 1/4V	4	Beam clamp thru ½" flange to conduit clamp, 1¼" conduit	100	25
SSF-BBC-C1 1/2V	4	Beam clamp thru ½" flange to conduit clamp, 1½" conduit	100	25
SSF-BBC-C2V	4	Beam clamp thru ½" flange to conduit clamp, 2" conduit	100	25
SSF-BBC-C1/2 3/4H	5	Beam clamp thru ½" flange to side mounted conduit clamp, ½"-¾" conduit	25	25
SSF-BBC-C1H	5	Beam clamp thru ½" flange to side mounted conduit clamp, 1" conduit	25	25
SSF-BBC-C1 1/4H	5	Beam clamp thru ½" flange to side mounted conduit clamp, 1¼" conduit	25	25
SSF-BBC-C1 1/2H	5	Beam clamp thru ½" flange to side mounted conduit clamp, 1½" conduit	25	25
SSF-BBC-C2H	5	Beam clamp thru ½" flange to side mounted conduit clamp, 2" conduit	25	25

Features

- ***Fits beam flanges to ½".***
- ***Supports ¼" and ⅜" threaded rod, s-hooks, electrical boxes, conduit and bridle rings.***
- ***¼"-20 or #10-24 threaded openings.***



Fig. 4



Fig. 5

© 2003 Thomas & Betts Corporation. Specifications are subject to change without notice. www.tnb.com

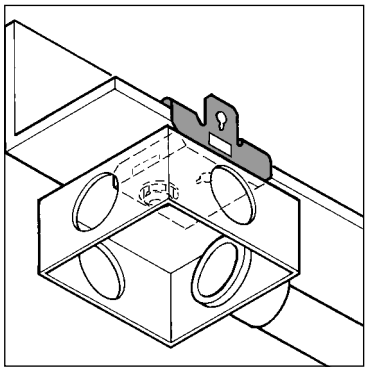

Hammer on Flange Clips

Cat. No.	Fig. No.	Description	Static Load Limit	Pkg. Per Box
SSF-BH1/4	1	Clip without stud, ⅛"-¼" flange thickness	100	100
SSF-BH1/2	1	Clip without stud, 5⁄16"-½" flange thickness	100	100
SSF-BH3/4	1	Clip without stud, 9⁄16"-¾" flange thickness	100	100
SSF-BH1/4S	2	Clip with stud, ⅛"-¼" flange thickness	100	100
SSF-BH1/2S	2	Clip with stud, 5⁄16"-½" flange thickness	100	100
SSF-BH3/4S	2	Clip with stud, 9⁄16"-¾" flange thickness	100	100

Features

- ***Hangs on box from the underside or to the front of beam flanges.***
- ***When used with combination conduit hanger, the conduit run lines up with "knock-outs" in outlet box and eliminates offsets and bends.***
- ***¼"-20 threaded opening.***
- ***Also available with staked stud, ¼"-20 x ⅜" to provide easier attachment of outlet boxes to beams. Eliminates having to use loose screws.***
- ***Supports 100 lbs. static vertical load limit.***
- ***Installs easily with a hammer.***



Fig. 1



Fig. 2





Hammer On Flange Clips

Cat. No.	Fig. No.	Description	Static Load Limit	Pkg. Per Box
SSF-BF1/8	1	Hammer-on Flange clip fits 3⁄32" - 9⁄64" flange thickness	160	100
SSF-BF1/4	1	Hammer-on Flange clip fits ⅛" - ¼" flange thickness	200	100
SSF-BF1/2	1	Hammer-on Flange clip fits 5⁄16" - ½" flange thickness	200	100
SSF-BF3/4	1	Hammer-on Flange clip fits 9⁄16" - ¾" flange thickness	200	100
SSF-BFF1/8	2	Hammer-on Flange clip fits 3⁄32" - 9⁄64" flange thickness with horizontal tab	50	25
SSF-BFF1/4	2	Hammer-on Flange clip fits ⅛" - ¼" flange thickness with horizontal tab	50	25
SSF-BFF1/2	2	Hammer-on Flange clip fits 5⁄16" - ½" flange thickness with horizontal tab	50	25
SSF-BFF3/4	2	Hammer-on Flange clip fits 9⁄16" - ¾" flange thickness with horizontal tab	50	25

Features

- ***Clips fit most bulb tees and beam flanges.***
- ***¼" hole provided.***
- ***Installs easily with a hammer.***



Fig. 1



Fig. 2

F

Steel City®

© 2003 Thomas & Betts Corporation. Specifications are subject to change without notice.



"Z" Purlin Clips

Cat. No.	Fig. No.	Description	Static Load Limit	Pkg. Per Box
SSF-BA1/4	1	Z purlin clip	100	100
SSF-BA1/4-B1/4	2	Z purlin to wire hanger, 1⁄16"-1⁄4" flange to 1⁄4" plain rod	100	25
SSF-BA1/4-B3/8	2	Z purlin to wire hanger, 1⁄16"-1⁄4" flange to 3⁄8" plain rod	100	25
SSF-BA1/4-B8	2	Z purlin to wire hanger, 1⁄16"-1⁄4" flange to #8 wire	100	25
SSF-BA1/4-A1/4T	3	Z purlin to wire hanger, 1⁄16"-1⁄4" flange to 1⁄4" threaded rod	100	25
SSF-BA1/4-A3/8	3	Z purlin to wire hanger, 1⁄16"-1⁄4" flange to 3⁄8" threaded rod (nuts required)	100	25
SSF-BA1/4-A3/8T	3	Z purlin to wire hanger, 1⁄16"-1⁄4" flange to 3⁄8" threaded rod	100	25

Features

- *Fits Z Purlin flanges 1⁄16" to 1⁄4".*
- *Rivited combinations support wire, rod or threaded rod from Z Purlin.*
- *Compensates for the angle of the Purlin design.*
- *Supports 100 lbs. static load limit.*
- *Installs easily with hammer.*



Fig. 1



Fig. 2



Fig. 3





"Z" Purlin Clips

Cat. No.	Fig. No.	Description	Static Load Limit	Pkg. Per Box
SSF-BZ1	1	Z purlin clip	100	100
SSF-BZ2	2	Z purlin clip with flat	100	100

Features

- *Compensates for angle of purlin.*
- *Provides method for running conduit parallel to purlin.*
- *Fits Z Purlin thicknesses up to 3⁄32".*
- *Supports 100 pounds static load limit.*
- *Installs easily with a hammer.*



Fig. 1



Fig. 2

© 2003 Thomas & Betts Corporation. Specifications are subject to change without notice. www.tnb.com




Features

- *Compensates for angle of purlin.*
- *Provides method for running conduit parallel to purlin.*
- *Fits Z-Purlin thicknesses up to 3/32".*
- *Supports 100 lbs. static load limit.*
- *Installs easily with a hammer.*


Fig. 1


Fig. 2

"Z" Purlin Clips

Cat. No.	Fig. No.	Description	Static Load Limit	Pkg. Per Box
SSF-BZ1-A1/4T	1	Z purlin clip to rod hanger, 1/4" threaded rod	100	25
SSF-BZ1-A3/8T	1	Z purlin clip to rod hanger, 3/8" threaded rod	100	25
SSF-BZ1-A3/8	1	Z purlin clip to rod hanger, 1/4" & 3/8" threaded rod, nuts required	100	25
SSF-BZ1-B8	2	Z purlin clip to rod/wire hanger, #8 wire	100	25
SSF-BZ1-B1/4	2	Z purlin clip to rod/wire hanger, 1/4" threaded or plain rod	100	25
SSF-BZ1-B3/8	2	Z purlin clip to rod/wire hanger, 3/8" threaded or plain rod	100	25




Features

- *Compensates for angle of purlin.*
- *Provides method for running conduit parallel to purlin.*
- *Fits Z-Purlin thicknesses up to 3/32".*
- *Supports 100 lbs. for static load limit for C series and 25 lbs. for S series.*
- *Installs easily with a hammer.*


Fig. 1


Fig. 2

"Z" Purlin Clips

Cat. No.	Fig. No.	Description	Static Load Limit	Pkg. Per Box
SSF-BZ2-S1/2	1	Z purlin to snap-in style conduit clip, 1/2" conduit	100	25
SSF-BZ2-S3/4	1	Z purlin to snap-in style conduit clip, 3/4" conduit	100	25
SSF-BZ2-S1	1	Z purlin to snap-in style conduit clip, 1" conduit	100	25
SSF-BZ2-C1/2 3/4	2	Z purlin finger close style conduit clip, 1/2"- 3/4" conduit	100	25
SSF-BZ2-C3/8	2	Z purlin finger close style conduit clip, 3/8" conduit	100	25
SSF-BZ2-C1	2	Z purlin finger close style conduit clip, 1" conduit	100	25
SSF-BZ2-C1 1/4	2	Z purlin finger close style conduit clip, 1- 1/4" conduit	100	25

© 2003 Thomas & Betts Corporation. Specifications are subject to change without notice.

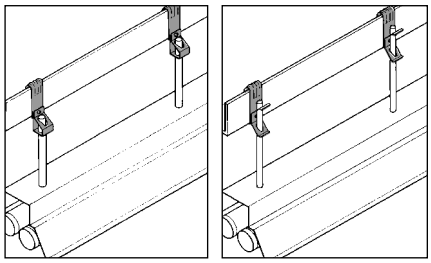

Features

- *2 sizes of C-Purlin clips to cover larger range of vertical flange sizes.*
- *Riveted combinations support wire, rod or threaded rod from bar joist, C-Purlin.*
- *Supports 160 lbs. static load limit.*
- *Installs easily with a hammer.*



Fig. 1



Fig. 2

"C" Purlin Clips

Cat. No.	Fig. No.	Description	Static Load Limit	Pkg. Per Box
SSF-BV1/16	1	C-Purlin clip fits 1⁄32" to 3⁄32" vertical flange	160	100
SSF-BV1/4	1	C-Purlin clips fits 3⁄32" to 9⁄32" vertical flange	160	100
SSF-BV1/16-B8	2	C-Purlin fits 1⁄32" to 3⁄32" vertical flange to #8 wire	160	25
SSF-BV1/16-B1/4	2	C-Purlin fits 1⁄32" to 3⁄32" vertical flange to 1⁄4" plain rod	160	25
SSF-BV1/16-B3/8	2	C-Purlin fits 1⁄32" to 3⁄32" vertical flange to 3⁄8" plain rod	160	25
SSF-BV1/4-B8	2	C-Purlin clip fits 3⁄32" to 9⁄32" vertical flange to #8 wire or 1⁄4" plain rod	160	25
SSF-BV1/4-B1/4	2	C-Purlin clips fits 3⁄32" to 9⁄32" vertical flange to plain rod	160	25
SSF-BV1/4-B3/8	2	C-Purlin fits 3⁄32" to 9⁄32" vertical flange to threaded rod	160	25

© 2003 Thomas & Betts Corporation. Specifications are subject to change without notice. www.tnb.com

Steel City®

Spring Steel Fasteners

Hangers

Pages F9-F12


Page F10


Page F10


Page F10


Page F10


Page F11


Page F11


Page F12


Page F12


Page F12

Page F12


Page F12


Page F12


Page F12


Page F12


Page F12


Page F12


Page F12

Thomas&Betts



Features

- *Offset bracket suspends plain rod, threaded rod or wire drops from laminated wood or concrete beams, joists, ceilings and walls.*
- *Supports 160 lbs. static load limit.*

Rod and Wire Hangers

Cat. No.	Fig. No.	Description	Static Load Limit	Pkg. Per Box
SSF-HB8-OB	1	Rod & wire hanger with offset bracket, #8 wire	160	25
SSF-HB1/4-OB	1	Rod & wire hanger with offset bracket, ¼" plain rod	160	25
SSF-HB3/8-OB	1	Rod & wire hanger with offset bracket, ⅜" plain rod	160	25
SSF-HA1/4-OBT	2	Rod & wire hanger with offset bracket, ¼" threaded rod	160	25
SSF-HA3/8-OBT	2	Rod & wire hanger with offset bracket, ⅜" threaded rod	160	25
SSF-HA3/8-OB	2	Rod & wire hanger with offset bracket, ¼"- ⅜" threaded rod, nuts required	160	25



Fig. 1



Fig. 2



Features

- *Angle Bracket suspends plain rod, threaded rod or wire drops from laminated wood or concrete beams, joists, ceilings and walls.*
- *Supports 160 pounds static load limit.*

Rod and Wire Hangers

Cat. No.	Fig. No.	Description	Static Load Limit	Pkg. Per Box
SSF-HB8-AB	1	Rod & wire angle bracket, #8 wire	160	25
SSF-HB1/4-AB	1	Rod & wire single bracket hanger, ¼" plain rod	160	25
SSF-HB3/8-AB	1	Rod & wire angle bracket hanger, ⅜" plain rod	160	25
SSF-HA1/4-ABT	2	Rod & wire hanger with angle bracket, ¼" threaded rod	160	25
SSF-HA3/8-ABT	2	Rod & wire hanger with angle bracket, ⅜" threaded rod	160	25
SSF-HA3/8-AB	2	Rod & wire angle bracket hanger, ¼"- ⅜" threaded rod, nuts required	160	25



Fig. 1



Fig. 2

© 2003 Thomas & Betts Corporation. Specifications are subject to change without notice. www.tnb.com





Features

- ***Used to suspend #8 wire, ¼", ⅜" plain rod or ¼" or ⅜" threaded rod from beam flanges ⅛" to ¾" thick.***
- ***Supports 200 lbs. static load limit.***
- ***Installs easily with a hammer.***



Fig. 1



Fig. 2

Plain and Threaded Rod Hangers

Cat. No.	Fig. No.	Description	Static Load Limit	Pkg. Per Box
SSF-HB8-F1/4	1	Rod/wire to beam hanger, ⅛"-¼" flange, #8 wire	200	25
SSF-HB8-F1/2	1	Rod/wire to beam hanger, 5⁄16"-½" flange, #8 wire	200	25
SSF-HB8-F3/4	1	Rod/wire to beam hanger, 9⁄16"-¾" flange, #8 wire	200	25
SSF-HB1/4-F1/4	1	Rod/wire to beam hanger, ⅛"-¼" flange, ¼" plain rod	200	25
SSF-HB1/4-F1/2	1	Rod/wire to beam hanger, 5⁄16"-½" flange, ¼" plain rod	200	25
SSF-HB1/4-F3/4	1	Rod/wire to beam hanger, 5⁄16"-¾" flange, ¼" plain rod	200	25
SSF-HB3/8-F1/4	1	Rod/wire to beam hanger, ⅛"-¼" flange, ⅜" plain rod	200	25
SSF-HB3/8-F1/2	1	Rod/wire to beam hanger, 5⁄16"-½" flange, ⅜" plain rod	200	25
SSF-HB3/8-F3/4	1	Rod/wire to beam hanger, 9⁄16"-¾" flange, ⅜" plain rod	200	25
SSF-HA1/4-F1/4T	2	Hammer-on rod hanger, ⅛"-¼" flange, ¼" threaded rod	200	25
SSF-HA1/4-F1/2T	2	Hammer-on rod hanger, 5⁄16"-½" flange, ¼" threaded rod	200	25
SSF-HA1/4-F3/4T	2	Hammer-on rod hanger, 9⁄16"-¾" flange, ¼" threaded rod	200	25
SSF-HA3/8-F1/4T	2	Hammer-on rod hanger, ⅛"-¼" flange, ⅜" threaded rod	200	25
SSF-HA3/8-F1/2T	2	Hammer-on rod hanger, 5⁄16"-½" flange, ⅜" threaded rod	200	25
SSF-HA3/8-F3/4T	2	Hammer-on rod hanger, 9⁄16"-¾" flange, ⅜" threaded rod	200	25
SSF-HA3/8-F1/4	2	Rod/wire to beam hanger, ⅛"-¼" flange, ¼" or ⅜" threaded rod	200	25
SSF-HA3/8-F1/2	2	Rod/wire to beam hanger, 5⁄16"-½" flange, ¼" or ⅜" threaded rod	200	25
SSF-HA3/8-F3/4	2	Rod/wire to beam hanger, 9⁄16"-¾" flange, ¼" or ⅜" threaded rod	200	25

© 2003 Thomas & Betts Corporation. Specifications are subject to change without notice.



Features

- *Accepts strap widths up to 1⅛".*
- *Can be attached to a wide variety of products.*
- *Supports 100 lbs. static load limit.*
- *Clips are made from galvanized steel.*

Strap Hanger Clips

Cat. No.	Fig. No.	Description	Static Load Limit	Pkg. Per Box
SSF-HS	1	Strap hanger clip	200	100
SSF-HR	2	Strap hanger clip, right angle	200	100
SSF-HR-F1/4	3	Strap hanger clip, right angle, ⅛"-¼" flange thickness	200	25
SSF-HR-F1/2	3	Strap hanger clip, right angle, 5⁄16"-½" flange thickness	200	25
SSF-HR-F3/4	3	Strap hanger clip, right angle, 9⁄16"-¾" flange thickness	200	25
SSF-HS-F1/4	4	Strap hanger clip, flange thickness ⅛"-¼"	200	25
SSF-HS-F1/2	4	Strap hanger clip, flange thickness 5⁄16"-½"	200	25
SSF-HS-F3/4	4	Strap hanger clip, flange thickness 5⁄16"-¾"	200	25



Fig. 1



Fig. 2

Fig. 3

Fig. 4



Features

- *Rod hanger available for ¼" and ⅜" threaded rod with or without thread impression.*

Miscellaneous Hangers

Cat. No.	Fig. No.	Description	Static Load Limit	Pkg. Per Box
SSF-HB8	1	Rod & wire hanger, #8 wire	160 lbs.	100
SSF-HB1/4	1	Rod & wire hanger, ¼" plain rod	160 lbs.	100
SSF-HB3/8	1	Rod & wire hanger, ⅜" plain rod	160 lbs.	100
SSF-HA3/8	2	Rod & wire hanger ¼"-⅜" threaded rod, nuts required	160 lbs.	100
SSF-HA1/4T	2	Rod & wire hanger with thread impression ¼" threaded rod	160 lbs.	100
SSF-HA3/8T	2	Rod & wire hanger with thread impression ⅜" threaded rod	160 lbs.	100
SSF-HOB	3	Offset bracket with ¼" hole	160 lbs.	100
SSF-HAB	4	Angle bracket with ¼" hole	160 lbs.	100
SSF-HSAB	5	Short angle bracket with ¼" hole	160 lbs.	100
SSF-HFB	6	Flat bracket with ¼" hole	160 lbs.	100
SSF-MA7	7	For T-grid, with 1" snap-in conduit clip		100



Fig. 1



Fig. 2



Fig. 3



Fig. 4



Fig. 5



Fig. 6

Fig. 7

Thomas&Betts

© 2003 Thomas & Betts Corporation. Specifications are subject to change without notice.

Steel City®

Spring Steel Fasteners

Conduit and Cable

Pages F13-F23


Page F14


Page F14


Page F15


Page F15


Page F15


Page F15


Page F16


Page F16


Page F16


Page F16


Page F17


Page F17


Page F17


Page F18

Page F18


Page F18


Page F19


Page F19


Page F20


Page F20


Page F21


Page F21


Page F21


Page F21


Page F21


Page F21


Page F21


Page F21


Page F21


Page F21


Page F21


Page F21


Page F21


Page F22


Page F22


Page F22


Page F22


Page F23


Page F23

Page F23


Page F23


Page F23

Thomas&Betts



Features

- *Available for ⅜" through 2" trade sizes for EMT, flexible conduit and MC/AC cable.*
- *Available with either a plain hole for ¼" bolt or a ¼"-20 thread impression.*
- *Shape of clip and clasp mechanism allows for hand installation (no tools needed).*
- *Unique clasp design has an aggressively angled tab and receiving hole to provide consistent, easy clasping of the clip.*
- *Supports 100 lbs. static load limit in the vertical position. Supports 25 lbs. static load limit in the horizontal position.*
- *Unique finger grips on the ends of the clip provide easy grip for hand installation, or easy grip of pliers when using pliers to install.*



Fig. 1

Conduit Clips

Cat. No.	Fig. No.	Conduit Size	Mounting Hole	Pkg. Per Box
SSF-CC3/8	1	14-2 thru 12-3 MC/AC Cable and ⅜" Conduits	9⁄32" Plain	100
SSF-CC1/2 3/4	1	½" - ¾"	9⁄32" Plain	100
SSF-CC1	1	1"	9⁄32" Plain	100
SSF-CC1 1/4	1	1¼"	9⁄32" Plain	100
SSF-CC1 1/2	1	1½"	9⁄32" Plain	100
SSF-CC2	1	2"	9⁄32" Plain	100
SSF-CC3/8T	1	14-2 thru 12-3 MC/AC Cable and ⅜" MC/AC Conduits	¼"-20 Thread Impression	100
SSF-CC1/2 3/4T	1	½" - ¾"	¼"-20 Thread Impression	100
SSF-CC1T	1	1"	¼"-20 Thread Impression	100
SSF-CC1 1/4T	1	1¼"	¼"-20 Thread Impression	100
SSF-CC1 1/2T	1	1½"	¼"-20 Thread Impression	100
SSF-CC2T	1	2"	¼"-20 Thread Impression	100



Features

- *Available for ½" through 1" EMT and rigid conduit.*
- *Available with either a plain hole for ¼" bolt or a ¼"-20 thread impression.*
- *Supports ultimate static load limit 25 pounds in the vertical position. Supports ultimate static load limit 15 pounds in the horizontal position.*

Conduit Clips

Cat. No.	Fig. No.	Conduit Size	Mounting Hole	Pkg. Per Box
SSF-CS1/2	1	½"	9⁄32" Plain	100
SSF-CS3/4	1	¾"	9⁄32" Plain	100
SSF-CS1	1	1"	9⁄32" Plain	100
SSF-CS1/2T	1	½"	¼"-20 Thread impression	100
SSF-CS3/4T	1	¾"	¼"-20 Thread impression	100
SSF-CS1T	1	1"	¼"-20 Thread impression	100



Fig. 1

© 2003 Thomas & Betts Corporation. Specifications are subject to change without notice. www.tnb.com



Features

- *Available with Spring Steel Conduit Clip bottom mounted or side mounted.*
- *Available for ⅜" through 2" trade sizes for EMT, rigid, flexible conduit and MC/AC cable.*
- *Fits beam flanges ⅛" through ¾" thick.*
- *Will pivot through 360°.*
- *Fig. 1 supports 75 lbs. static load limit.*
- *Fig. 2 supports 25 lbs. static load limit.*
- *Installs easily with a hammer and pliers.*



Fig. 1



Fig. 2

Flange Mount Conduit Clips

Cat. No.	Fig. No.	Cat. No.	Fig. No.	Description	Pkg./ Box
SSF-CC3/8-H1/4	1	**SSF-CC3/8-F1/4**	2	⅜" conduit, MC/AC cable to ⅛" to ¼" flanges 14-2 thru 12-3 MC/AC cable and ⅜" conduits	25
SSF-CC1/2 3/4-H1/4	1	**SSF-CC1/2 3/4-F1/4**	2	½" conduit to ¾" conduit to ⅛" to ¼" flanges	25
SSF-CC1-H1/4	1	**SSF-CC1-F1/4**	2	1" conduit to ⅛" to ¼" flanges	25
SSF-CC1 1/4-H1/4	1	**SSF-CC1 1/4-F1/4**	2	1-14" conduit to ⅛" to ¼" flanges	25
SSF-CC1 1/2-H1/4	1	**SSF-CC1 1/2-F1/4**	2	1-12" conduit to ⅛" to ¼" flanges	25
SSF-CC2-H1/4	1	**SSF-CC2-F1/4**	2	2" conduit to ⅛" to ¼" flanges	25
SSF-CC3/8-H1/2	1	**SSF-CC3/8-F1/2**	2	⅜" conduit, MC/AC cable to 5⁄16" to ½" flanges 14-2 thru 12-3 MC/AC cable and ⅜" conduits	25
SSF-CC1/2 3/4-H1/2	1	**SSF-CC1/2 3/4-F1/2**	2	½" conduit to ¾" conduit to 5⁄16" to ½" flanges	25
SSF-CC1-H1/2	1	**SSF-CC1-F1/2**	2	1" conduit to 5⁄16" to ½" flanges	25
SSF-CC1 1/4-H1/2	1	**SSF-CC1 1/4-F1/2**	2	1-14" conduit to 5⁄16" to ½" flanges	25
SSF-CC1 1/2-H1/2	1	**SSF-CC1 1/2-F1/2**	2	1-12" conduit to 5⁄16" to ½" flanges	25
SSF-CC2-H1/2	1	**SSF-CC2-F1/2**	2	2" conduit to 5⁄16" to ½" flanges	25
SSF-CC3/8-H3/4	1	**SSF-CC3/8-F3/4**	2	⅜" conduit, MC/AC cable to 9⁄16" to ¾" flanges 14-2 thru 12-3 MC/AC cable and ⅜" conduits	25
SSF-CC1/2 3/4-H3/4	1	**SSF-CC1/2 3/4-F3/4**	2	½" conduit to ¾" conduit to 9⁄16" to ¾" flanges	25
SSF-CC1-H3/4	1	**SSF-CC1-F3/4**	2	1" conduit to 9⁄16" to ¾" flanges	25
SSF-CC1 1/4-H3/4	1	**SSF-CC1 1/4-F3/4**	2	1-¼" conduit to 9⁄16" to ¾" flanges	25
SSF-CC1 1/2-H3/4	1	**SSF-CC1 1/2-F3/4**	2	1-½" conduit to 9⁄16" to ¾" flanges	25
SSF-CC2-H3/4	1	**SSF-CC2-F3/4**	2	2" conduit to 9⁄16" to ¾" flanges	25



Features

- *Available with Spring Steel Conduit Clip bottom mounted or side mounted.*
- *Available for ½" through 1" EMT and rigid conduit.*
- *Fits beam flanges ⅛" through ¾" thick.*
- *Will pivot 360°.*
- *Fig. 1 supports 25 lbs. static load limit.*
- *Fig. 2 supports 15 lbs. static load limit.*
- *Requires only hammer to install.*



Fig. 1



Fig. 2

Flange Mount Snap-in Conduit Clip

Cat. No.	Fig. No.	Description	Static Load Limit	Pkg. Per Box
SSF-CS1/2-H1/4	1	½" conduit to ⅛" to ¼" flanges	25	25
SSF-CS3/4-H1/4	1	¾" conduit to ⅛" to ¼" flanges	25	25
SSF-CS1-H1/4	1	1" conduit to ⅛" to ¼" flanges	25	25
SSF-CS1/2-H1/2	1	½" conduit to 5⁄16" to ½" flanges	25	25
SSF-CS3/4-H1/2	1	¾" conduit to 5⁄16" to ½" flanges	25	25
SSF-CS1-H1/2	1	1" conduit to 5⁄16" to ½" flanges	25	25
SSF-CS1/2-H3/4	1	½" conduit to 9⁄16" to ¾" flanges	25	25
SSF-CS3/4-H3/4	1	¾" conduit to 5⁄16" to ½" flanges	25	25
SSF-CS1-H3/4	1	1" conduit to 5⁄16" to ½" flanges	25	25
SSF-CS1/2-F1/4	2	½" conduit to ⅛" to ¼" flanges	15	25
SSF-CS3/4-F1/4	2	¾" conduit to ⅛" to ¼" flanges	15	25
SSF-CS1-F1/4	2	1" conduit to ⅛" to ¼" flanges	15	25
SSF-CS1/2-F1/2	2	½" conduit to 5⁄16" to ½" flanges	15	25
SSF-CS3/4-F1/2	2	¾" conduit to 5⁄16" to ½" flanges	15	25
SSF-C1-F1/2	2	1" conduit to 5⁄16" to ½" flanges	15	25
SSF-CS1/2-F3/4	2	½" conduit to 9⁄16" to ¾" flanges	15	25
SSF-CS3/4-F3/4	2	¾" conduit to 5⁄16" to ½" flanges	15	25
SSF-CS1-F3/4	2	1" conduit to 5⁄16" to ½" flanges	15	25

Thomas&Betts

© 2003 Thomas & Betts Corporation. Specifications are subject to change without notice.



Multi-Function Utility Clip from Drop Wire or Flange

Cat. No.	Fig. No.	Description	Static Load Limit	Pkg. Per Box
SSF-CUC	1	Multi-function utility clip	50	100
SSF-CUC-S1/2	2	Utility clip to ½" conduit	15	25
SSF-CUC-S3/4	2	Utility clip to ¾" conduit	15	25
SSF-CUC-S1	2	Utility clip to 1" conduit	15	25
SSF-CUC-C1/2 3/4	3	Utility clip to ½" or ¾" conduit	25	25
SSF-CUC-C1	3	Utility clip to 1" conduit	25	25

Features

FROM DROP WIRE OR FLANGE

- ***Attaches to #12 wire through ⅜" rod.***
- ***Fits ⅛" to ⅜" flanges.***
- ***Provides attachment of conduit and boxes.***
- ***Supports #10-24 and ¼"-20 threaded bridle rings.***
- ***Assemblies to support ½", ¾" and 1" EMT and rigid conduit.***
- ***Also attaches to ¼" and ⅜" threaded rod.***

Fig. 1



Fig. 2



Fig. 3



Cable from Drop Wire Support

Cat. No.	Fig. No.	Description	Static Load Limit	Pkg. Per Box
SSF-CB706	1	Cable from drop wire support	25	100

Features

- ***Exclusive slot keeps drop wire centered.***
- ***Will not bend or deform drop wire.***
- ***Delivers faster installation.***
- ***Supports MC/AC, 14-2 through 12-3 cable and ½" EMT (.433"-.706" O.D.) from #8-#12 wire and ¼" plain and threaded rod.***
- ***Eliminates the need to trap cable against drop wire.***
- ***Supports 25 lbs. static load limit.***
- ***No tools required.***



Fig. 1

© 2003 Thomas & Betts Corporation. Specifications are subject to change without notice. www.tnb.com







Features

- ***CK Series attaches conduit (EMT, Rigid, ENT® and Aluminum) to drop wire, rods or flanges.***
- ***Application "A" (vertical flange), supports 25 lbs. static load limit.***
- ***Application "B" (horizontal flange), supports 100 lbs. static load limit.***
- ***Application "C" (vertical drop wire), supports 50 lbs. static load limit.***



Fig. 1



Fig. 2

Conduit Hangers from Flange, Wire or Rod

Cat. No.	Fig. No.	Description	Pkg. Per Box
SSF-CK1/2	1	Conduit hangers for flange wire or rod	100
SSF-CK3/4	1	Conduit hangers for flange wire or rod	100
SSF-CK1	2	Conduit hangers for flange wire or rod	100

Wire/Rod

Conduit Size	#10 & #12 Wire	#8 & #9 Wire	3⁄16" Plain Rod	1⁄4" Plain & Threaded Rod	3⁄8" Plain & Threaded Rod
1/2 EMT	CK1/2	CK1/2	CK1/2	CK1/2	CK3/4
1/2 Rigid	CK1/2	CK1/2	CK1/2	CK3/4	CK3/4
3/4 EMT	CK3/4	CK3/4	CK3/4	CK3/4	CK1
3/4 Rigid	CK3/4	CK3/4	CK3/4	CK1	CK1
1 EMT	–	CK1	CK1	CK1	CK1
1 Rigid	–	CK1	CK1	CK1	–

Flange

Conduit Size	1⁄8" Flange	3⁄16" - 1⁄4" Flange	5⁄16 - 3⁄8" Flange	7⁄16" - 1⁄2" Flange
1/2 EMT	CK1/2	CK1/2	CK3/4	CK3/4
1/2 Rigid	CK1/2	CK3/4	CK3/4	CK1
3/4 EMT	CK3/4	CK3/4	CK1	CK1
3/4 Rigid	CK3/4	CK1	CK1	CK1
1 EMT	CK1	CK1	CK1	CK1
1 Rigid	CK1	CK1	–	–



Features

FROM DROP WIRE

- ***One piece construction.***
- ***Can be used in vertical or horizontal positions.***
- ***Fits 14-2 through 12-3 armored cable (.433-.535 outer diameter)***
- ***No load rating for positioning only.***
- ***No installation tools required.***

Flexible Conduit Hangers from Drop Wire

Cat. No.	Fig. No.	Description	Pkg. Per Box
SSF-CK535	1	Flexible conduit hanger from drop wire, #8-#12 wire, .433-.535 O.D. cable	100



Fig. 1

© 2003 Thomas & Betts Corporation. Specifications are subject to change without notice.





Features

- *Supports cable from 1/16"-1/2" flange.*
- *Works with MC and AC cable dimensions .178 to 1.250.*
- *Snaps easily onto flange.*
- *Cable snaps right into fastener.*
- *No load rating. For positioning only.*
- *Installs easily with a hammer.*



Fig. 1



Fig. 2



Fig. 3

Cable Snap Clip

Cat. No.	Fig. No.	Cable O.D.	Flange Thickness	Pkg. Per Box
SSF-CES218	1	.178"-.218"	1/16" - 3/16"	100
SSF-CES281	1	.218"-.276"	1/16" - 3/16"	100
SSF-CES375	1	.312"-.375"	1/16" - 3/16"	100
SSF-CES437	1	.375"-.437"	1/16" - 3/16"	100
SSF-CES562	1	.468"-.562"	1/16" - 3/16"	100
SSF-CES718	1	.600"-.718"	1/16" - 3/16"	100
SSF-CES937	1	.750"-.937"	1/16" - 3/16"	100
SSF-CES1250	1	.968"-1.250"	1/16" - 3/16"	100
SSF-CEM218	1	.178"-.218"	3/16" - 9/32"	100
SSF-CEM281	1	.218"-.276"	3/16" - 9/32"	100
SSF-CEM375	1	.312"-.375"	3/16" - 9/32"	100
SSF-CEM437	1	.375"-.437"	3/16" - 9/32"	100
SSF-CEM562	1	.468"-.562"	3/16" - 9/32"	100
SSF-CEM718	1	.600"-.718"	3/16" - 9/32"	100
SSF-CEM937	1	.750"-.937"	3/16" - 9/32"	100
SSF-CEM1250	1	.968"-1.250"	3/16" - 9/32"	100
SSF-CEL218	1	.178"-.218"	5/16" - 1/2"	100
SSF-CEL281	1	.218"-.276"	5/16" - 1/2"	100
SSF-CEL375	1	.312"-.375"	5/16" - 1/2"	100
SSF-CEL437	1	.375"-.437"	5/16" - 1/2"	100
SSF-CEL562	1	.468"-.562"	5/16" - 1/2"	100
SSF-CEL718	1	.600"-.718"	5/16" - 1/2"	100
SSF-CEL937	1	.750"-.937"	5/16" - 1/2"	100
SSF-CEL1250	1	.968"-1.250"	5/16" - 1/2"	100
SSF-CF1/8	2	.200"-.468"	1/8" - 1/4"	100
SSF-CF3/8	2	.276"-.600"	5/16" - 7/16"	100
SSF-CAXL1	3	Snap clip adapter	1/2" - 5/8"	100
SSF-CAXL2	3	Snap clip adapter	5/8" - 3/4"	100

© 2003 Thomas & Betts Corporation. Specifications are subject to change without notice. www.tnb.com



Features

- *Provides quick attachment for MC or AC to metal stud.*
- *No load rating. For positioning only.*
- *No tools required.*

Flexible Conduit to Metal Stud

Cat. No.	Fig. No.	Description	Pkg. Per Box
SSF-CM535	1	MC/AC cable to metal stud clip, 14-2 thru 12-3 cable (.433"-535" O.D.)	100



Fig. 1



Features

- *Effectively supports 3 runs (CW3) or 6 runs (CW6) of MC/AC cable. Also can be used to support all types of low voltage cabling as a bridle ring would.*
- *Locking hook contains cables inside the loop.*

Flexible Conduit and Cable Hanger

Cat. No.	Fig. No.	No. of Runs of MC/AC Cable	Inner Diameter	Ultimate Static Load Limit	Qty. Per Box
SSF-CW3	1	3	1⅛"	20	100
SSF-CW6	1	6	1¾"	50	100

Fig. 1

© 2003 Thomas & Betts Corporation. Specifications are subject to change without notice.





Features

- *Back-to-back conduit clips for individual use or use as lightweight trapeze.*
- *Available for ⅜" through 2" sizes for EMT, rigid, flexible conduit and MC/AC cable.*
- *For use as lightweight trapeze. Total load limit is 100 lbs.*
- *Clips for vertical use, static load limit 100 lbs.*
- *No screws or bolts.*

Lightweight Trapeze

Cat. No.	Fig. No.	Description	Pkg. Per Box
SSF-CC1-C3/8	3	Back-to-back conduit clips, 14-2 thru 12-3 MC/AC to 1" conduit	25
SSF-CC1-C1/2 3/4	3	Back-to-back conduit clips, ½" or ¾" conduit to 1" conduit	25
SSF-CC1-C1	3	Back-to-back conduit clips 1" conduit to 1" conduit	25
SSF-CC1-C1 1/4	3	Back-to-back conduit clips 1¼" conduit to 1" conduit	25
SSF-CC1-C1 1/2	3	Back-to-back conduit clips 1½" conduit to 1" conduit	25
SSF-CC1-C2	3	Back-to-back conduit clips 2" conduit to 1" conduit	25
SSF-CC1/2 3/4-C1/2 3/4	3	Back-to-back conduit clips ½" or ¾" conduit	25



Fig. 3

Fig. 4

Conduit To Conduit Clips

Cat. No.	Fig. No.	Description	Static Load Limit	Pkg. Per Box
SSF-CS1/2-S1/2	4	Back-to-back snap-in conduit clip, ½" to ½" EMT or rigid	25	25
SSF-CS1/2-S3/4	4	Back-to-back snap-in conduit clip, ½" to ¾" EMT or rigid	25	25
SSF-CS1/2-S1	4	Back-to-back snap-in conduit clip, ½" to 1" EMT or rigid	25	25
SSF-CS3/4-S3/4	4	Back-to-back snap-in conduit clip, ¾" to 1" EMT or rigid	25	25
SSF-CS3/4-S1	4	Back-to-back snap-in conduit clip, ¾" to 1" EMT or rigid	25	25
SSF-CS1-S1	4	Back-to-back snap-in conduit clip, 1" to 1" EMT or rigid	25	25

© 2003 Thomas & Betts Corporation. Specifications are subject to change without notice. www.tnb.com



Features

- ***Clips available for 1, 2, or 4 cable runs.***
- ***The standard CR2 part can be broken apart to create 2 single cable run clips.***
- ***Mounting holes available for mounting flat or perpendicular to stud or flange.***
- ***Mounting clips for quick attachment to metal studs.***
- ***Sturdy design provides firm support of attached cable.***

MC/AC Cable – Flexible Conduit

Cat. No.	Fig. No.	Description	Pkg. Per Box
SSF-CR2	1	Metal or wood stud and ⅛" flange	100
SSF-CR1	2	Supports 2 runs of MC/AC cable	100
SSF-CR4	3	Supports up to 4 runs of MC/AC cable	25
SSF-CR2-BCH	4	5/16" thru ½" flange	25
SSF-CR2-BCV	5	5/16" thru ½" flange	25
SSF-CR2-F1/2	6	⅛" thru ¼" flange	25
SSF-CR2-F1/4	6	⅛" thru ¼" flange	25
SSF-CR2-H1/2	7	1/16" thru ¼" C purlin or vertical flange	25
SSF-CR2-H1/4	7	1/16" thru ¼" C purlin or vertical flange	25
SSF-CR2-V1/4	8	1/16" thru ¼" C purlin or vertical flange	25
SSF-CR2-Z2	9	Z purlin	25
SSF-CR2-UC	10	Through metal stud	25
SSF-CR1-CV	11	Acoustical tee	25
SSF-CR2-AB	12	Through metal stud	25
SSF-CR1-UC	13	Through metal stud	25
SSF-CR1-F1/2	14	5/16" through ½" flange	25
SSF-CR1-F1/4	14	⅛" through ¼" flange	25
SSF-CR1-BCH	15	Through ½" flange	25



Fig. 1



Fig. 2



Fig. 3



Fig. 4



Fig. 5



Fig. 6



Fig. 7



Fig. 8



Fig. 9



Fig. 10

Fig. 11



Fig. 12



Fig. 13



Fig. 14



Fig. 15

Thomas&Betts

© 2003 Thomas & Betts Corporation. Specifications are subject to change without notice.



Features

- *Supports conduit on both sides of a junction box.*
- *Holes in opposite ends of 18" bar accommodate CC and CS series conduit clips.*
- *A center hole accepts BH flange clips and CVC utility clips fasteners for attachment to threaded rod.*

Support Box & Conduits From Single Drop Wires, Rods and Flanges

Cat. No.	Fig. No.	Description	Pkg. Per Box
SSF-CX18-C3/8H1/4	1	Support bar for conduit/box, MC/AC cable to ⅜" flex to ⅛" to ¼" flange	25
SSF-CX18-C3/8H1/2	1	Support bar for conduit/box, MC/AC cable to ⅜" flex to 9⁄16" to ½" flange	25
SSF-CX18-C1/2 3/4-H1/4	1	Support bar for conduit/box, ½" & ¾" conduit to ⅛" to ¼" flange	25
SSF-CX18-C1/2 3/4-H1/2	1	Support bar for conduit/box, ½" & ¾" conduit to 9⁄16" to ½" flange	25
SSF-CX18-C1-H1/4	1	Support bar for conduit/box, 1" conduit to ⅛" to ¼" flange	25
SSF-CX18-C1-H1/2	1	Support bar for conduit/box 1" conduit to 9⁄16" to ½" flange	25
SSF-CX18-C3/8S	2	Support bar for conduit/box, MC/AC cable to ⅜" flex, ¼"-20 x 9⁄16" stud in center hole	25
SSF-CX18-C1/2 3/4S	2	Support bar for conduit/box, ½" to ¾" conduit, ¼"-20 x 9⁄16" stud in center hole	25
SSF-CX18-C1S	2	Support bar for conduit/box, 1" conduit to ⅜" flex, ¼"-20 x 9⁄16" stud in center hole	25
SSF-CX18-C3/8	1	Support bar for conduit/box, MC/AC cable to ⅜" flex for screw or threaded rod mount	25
SSF-CX18-C1/2 3/4	1	Support bar for conduit/box, ½" to ¾" conduit for screw or threaded rod mount	25
SSF-CX18-C1	1	Support bar for conduit/box, 1" conduit for screw or threaded rod mount	25
SSF-CX18-C3/8UC	2	Support bar for conduit/box, MC/AC cable to ⅜" flex from #12 wire thru ⅜" rod	25
SSF-CX18-C1/2 3/4UC	2	Support bar for conduit/box, ½" & ¾" conduit from #12 wire thru ⅜" rod	25
SSF-CX18-C1UC	2	Support bar for conduit/box, 1" conduit from #12 wire thru ⅜" rod	25

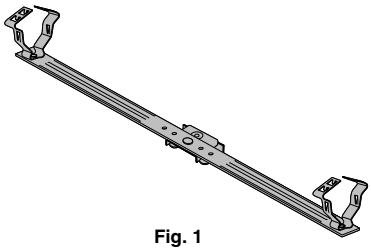

Fig. 1

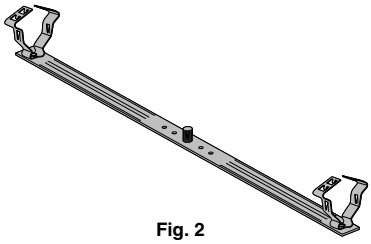

Fig. 2

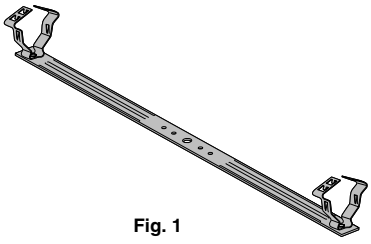

Fig. 1

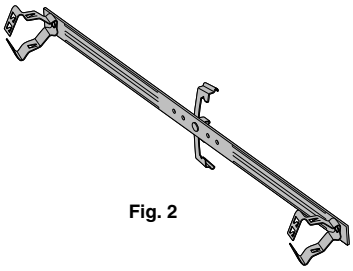

Fig. 2

© 2003 Thomas & Betts Corporation. Specifications are subject to change without notice. www.tnb.com

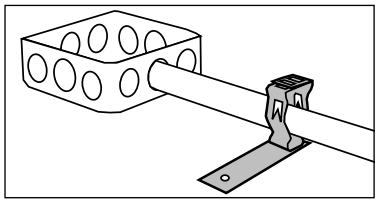

Features

- *Attach conduit to steel, concrete or wood.*
- *FB Series can be used to avoid offset bends when used with 1½" deep boxes.*
- *OB Series can be used to avoid offset bends when used with 2⅛" deep boxes.*

Nailing Bracket

Cat. No.	Fig. No.	Description	Pkg. Per Box
SSF-CC1/2 3/4-FB	1	Nailing bracket riveted to conduit clip, ½" & ¾" conduit	25
SSF-CS1/2-FB	2	Nailing bracket riveted to snap-in conduit clip, ½" EMT & Rigid	25
SSF-CS3/4-FB	2	Nailing bracket riveted to snap-in conduit clip, ¾" EMT & Rigid	25
SSF-CS1/2-OB	3	Offset nailing bracket - ½" conduit	25
SSF-CS3/4-OB	3	Offset nailing bracket - ¾" conduit	25
SSF-CS1-OB	3	Offset nailing bracket - 1" conduit	25



Fig. 1



Fig. 2



Fig. 3



Features

- *Secures MC/AC cable bundles and Telecom cable bundles.*
- *11" cable tie included*

Cable Tie Fasteners

Cat. No.	Fig. No.	Description	Qty. Per Box
SSF-CT-F1/2	1	5⁄16" to ½" flange	25
SSF-CT-F1/4	1	⅛" to ¼" flange	25
SSF-CT-V1/4	2	Through ¼" flange	25
SSF-CT-UC	3	Utility clip	25
SSF-CT-A1/4	4	⅛" to ¼" Vertical flange	25
SSF-CT-AB	5	Angle bracket	25
SSF-CT-BC	6	Through ½" flange	25
SSF-CT-CH	7	Acoustical tee	25
L11-120-9-C	8	11" Cable Tie	25



Fig. 1



Fig. 2



Fig. 3



Fig. 4



Fig. 5



Fig. 6

Fig. 8

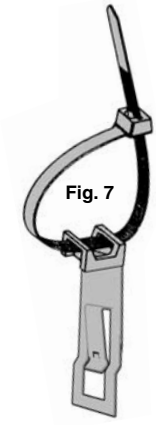

Fig. 7

© 2003 Thomas & Betts Corporation. Specifications are subject to change without notice.

© 2003 Thomas & Betts Corporation. Specifications are subject to change without notice.

Steel City®

Spring Steel Fasteners

Stud Wall & Drywall

Pages F25-F33

Page F26

Page F26


Page F27


Page F27


Page F27


Page F27


Page F27


Page F27


Page F28


Page F28


Page F28


Page F28


Page F28


Page F29


Page F29


Page F29


Page F29


Page F30


Page F30


Page F30


Page F30


Page F31


Page F31


Page F31


Page F31


Page F32


Page F32


Page F32


Page F32


Page F32


Page F32


Page F33


Page F33


Page F33


Page F33

Thomas&Betts



Cable Support

Cat. No.	Fig. No.	Description	Qty. Per Box
SSF-SC6	1	Nonmetallic sheathed MC/AC cable to stud clip	100

Cable Type	Cable Size	Max. Qty./ Fastener
Nonmetallic Sheathed Cable	14-2, 12-2, 10-2, 14-3 12-3 and 10-3 w/ground	6
Nonmetallic	8-2 and 6-2 w/ground	4
Metallic Clad (MC) Cable	14-2, 12-2, 10-2, 14-3 12-3, 10-3, 14-4, 12-4 and 10-4 w/ground	4
Armored Cable (AC)	14-4, 12-2, 10-2, 8-2 14-3, 12-3, 10-3, 14-4 12-4 and 10-4 w/ground	4
Flexible Conduit (BX)	5/16, 3/8	4

Features

- ***Supports up to 4 runs of MC and AC cable and up to 6 runs of nonmetallic sheathed cable.***
- ***Installs with nails or staple or sheet metal screws.***
- ***Complies with NEC 300-4d for all wood and metal studs.***
- ***Made with high strength plastic.***



Fig. 1



Screw On Conduit Support

Cat. No.	Fig. No.	Description	Qty. Per Box
SSF-SS1/2 3/4	1	½" and ¾" EMT conduit and MC/AC to metal or wood stud. For 1-½" deep box.	100
SSF-SS1/2 3/4D	1	½" and ¾" EMT conduit, and MC/AC to metal or wood stud. For 2⅛" deep box.	100

Features

- ***Supports ½" and ¾" EMT conduit and MC/AC cable.***
- ***Works with wood or metal stud.***
- ***Preset bend provides alignment with knockouts for 1½" deep boxes or 2⅛" deep boxes.***



Fig. 1

© 2003 Thomas & Betts Corporation. Specifications are subject to change without notice. **www.tnb.com**



Features

- *Fits most electrical boxes requiring plaster rings.*
- *Fits most metal stud sizes.*
- *Will not move on stud.*
- *Wider part for more secure fastening.*
- *No screws required.*
- *Support leg braces box against stud.*
- *Installs easily with a hammer.*

Snap On Box Clip

Cat. No.	Fig. No.	Description	Pkg. Per Box
SSF-SMX	1	Snap on box support for mounting to stud	100
SSF-SK	2	Screw to stud, box support	100
SSF-SK-C1/2 3/4	3	½"-¾" finger close conduit clip	25
SSF-SK-C1	3	1" finger close conduit clip	25
SSF-SK-S1/2	4	½" snap-in conduit clip	25
SSF-SK-S3/4	4	¾" snap-in conduit clip	25
SSF-SK-S1	4	1" snap-in conduit clip	25



Fig. 1



Fig. 2



Fig. 3



Fig. 4





Features

- *Provides side support for electrical boxes.*
- *Works with most electrical boxes for 2½", 3½" and 4" metal stud depths.*

Far Side Box Support

Cat. No.	Fig. No.	Description	Pkg. Per Box
SS1-TB	1	Far side box support	100
50	2	Box brace for 4" square or octagonal box	100
SSF-SX	3	Electrical box support	100



Fig. 1



Fig. 2



Fig. 3

© 2003 Thomas & Betts Corporation. Specifications are subject to change without notice.



Features

- ***Attaches securely to most metal stud sizes.***
- ***Adjustable offset allows the box to protrude through drywall sizes: ¼", ⅜", ½", ⅝", or ¾".***
- ***Riveted to accommodate your drywall requirements.***

Switch Box or Conduit to Metal Stud

Cat. No.	Fig. No.	Description	Pkg. Per Box
SSF-SFA	1	Snap on box support for mounting to stud, adjustable	25
SSF-SF0	2	Snap on box support for mounting to stud, riveted for flush to stud face	25
SSF-SF1/4	2	Snap on box support for mounting to stud, riveted for ¼" drywall	25
SSF-SF3/8	2	Snap on box support for mounting to stud, riveted for ⅜" drywall	25
SSF-SF1/2	2	Snap on box support for mounting to stud, riveted for ½" drywall	25
SSF-SF5/8	2	Snap on box support for mounting to stud, riveted for ⅝" drywall	25
SSF-SF3/4	2	Snap on box support for mounting to stud, riveted for ¾" drywall	25
SSF-SFT	3	Snap on box support for mounting to stud with ¼"-20 thread impression	25
SSF-SF-S1/2	4	Snap on stud, push-in conduit clip, ½" conduit	25
SSF-SF-S3/4	4	Snap on stud, push-in conduit clip, ¾" conduit	25
SSF-SF-S1	4	Snap on stud, push-in conduit clip, 1" conduit	25
SSF-SF-C3/8	5	Snap on stud, conduit support clip, ⅜" conduit or MC/AC cable	25
SSF-SF-C1/2 3/4	5	Snap on stud, conduit support clip, ½" - ¾" conduit	25
SSF-SF-C1	5	Snap on stud, conduit support clip, 1" conduit	25



Fig. 1



Fig. 2



Fig. 3



Fig. 4



Fig. 5

© 2003 Thomas & Betts Corporation. Specifications are subject to change without notice. **www.tnb.com**



Mounting Bracket

Cat. No.	Fig. No.	Description	Pkg. Per Box
SSF-SH2346	1	4" & 4 11/16" outlet boxes to 2½", 3½", 4" & 6" metal studs	100
SSF-SH4	2	4" & 4 11/16" outlet boxes to 4" metal studs	50
SSF-SH6	2	4" & 4 11/16" outlet boxes to 6" metal studs	50

Features

- ***Attaches 4" and 4 11/16" electrical boxes to metal stud.***
- ***Support leg can be attached to stud to eliminate movement of box in wall.***
- ***Attaches to metal or wood stud using self tapping screws and screw gun or nails.***
- ***One part mounts boxes for 1½", 2½", 3½", 4" and 6" stud which means less inventory.***
- ***SH4, SH6, brackets available specifically for 4" and 6" studs respectively.***



Fig. 1



Fig. 2



Screw Gun Box Bracket

Cat. No.	Fig. No.	Description	Stud Spacing	Box Depth	Pkg.Per Box
SSF-SG1-16	1	Preset box bracket	16"	1½"	50
SSF-SG1-24	1	Preset box bracket	24"	1½"	50
SSF-SG16P	2	Preset box bracket	16"	1½" or 2⅛"	50
SSF-SG16A	3	Adjustable box bracket	11"-18"	1½" or 2⅛"	50
SSF-SG2-16	1	Preset box bracket	16"	2⅛"	50
SSF-SG2-24	1	Preset box bracket	24"	2⅛"	50
SSF-SG24P	2	Preset box bracket	24"	1½" or 2⅛"	50
SSF-SG24A	3	Adjustable box bracket	17"-26"	1½" or 2⅛"	50

Features

- ***Self tapping screws are aligned with the dimples so that the box is straight.***
- ***Allows mounting of multiple boxes.***
- ***Preset for metal stud 16" or 24" on center.***
- ***Depth set for 1½" or 2⅛" deep electrical box.***
- ***Installs easily with a screw gun.***
- ***SGP and SGA brackets have adjustable tabs for 1½" or 2⅛" deep boxes.***
- ***SGA brackets adjustable for non-standard stud spacing.***



Fig. 1



Fig. 2



Fig. 3

© 2003 Thomas & Betts Corporation. Specifications are subject to change without notice.



Box Mounting Brackets for Between Studs

Cat. No.	Fig. No.	Description	Pkg. Per Box
SSF-SB16	1	Box mounting bracket for between studs, 16" stud spacing	25
SSF-SB24	2	Box mounting bracket for between studs, 24" stud spacing	25
SSF-SB16F	3	Box mounting bracket, flat version, up to 16" stud spacing	25
SSF-SB24F	4	Box mounting bracket, flat version, up to 24" stud spacing	25

Features

- *Supports electrical boxes, plaster rings or low voltage devices from one bracket.*
- *Accommodates 4" or 4 1/16" boxes.*
- *Bendable leg serves as a bracket stabilizer.*
- *SB16F and SB24F flat versions allow mounting for any stud spacing, from 4" to 24".*
- *SB brackets allow box mounting in all four 90° orientations.*



Fig. 1



Fig. 2



Fig. 3



Fig. 4



Extension Plate Bracket

Cat. No.	Fig. No.	Description	Pkg. Per Box
SSF-SV12	1	Extension plate bracket, 12" height	50
SSF-SV18	1	Extension plate bracket, 18" height	50
SSF-S6X	2	Extender for 6" metal studs	100

Features

- *Improved bracket with bendable stabilizer leg for use on 2½" and 3½" metal studs.*
- *Mounts outlet boxes 12" or 18" offset from either a metal stud track or a stud.*
- *When mounted, drywall ring is brought to within 1/8" of drywall every time and will not bulge or break out drywall.*
- *Mounts 4" or 4 1/16" outlet boxes, 1½" or 2⅛" deep.*
- *The SSF-S6X extender works with SSF-SV12, SSF-SV18, SSF-SB16 and SSF-SB24 to extend stabilizer leg when using 6" stud.*
- *SV18 provides compliance with Americans with disabilities act (ADA) requirements.*



Fig. 1



Fig. 2

© 2003 Thomas & Betts Corporation. Specifications are subject to change without notice. www.tnb.com



Switch Box Bracket

Cat. No.	Fig. No.	Description	Pkg. Per Box
SSF-SHSB	1	Switch box bracket	100



Fig. 1

Features

- ***Fits 2" x 3" switch boxes with one or two screw plaster ears.***
- ***Uses one bracket on 2½" and 3½" metal studs.***
- ***Bracket can be piggy-backed on same side of metal stud (singly or any number in series) giving greater flexibility to installer.***
- ***Brackets can be mounted on both sides of metal stud for double mounting.***
- ***Will not bulge or break out the drywall when mounted.***



Floor Mounted Box Supports

Cat. No.	Fig. No.	Description	Pkg. Per Box
7502	1	Footed box supports, 20" height	25
7503	1	Footed box supports, 30" height	50



Fig. 1

Features

- ***Mounts on metal or wood studding.***
- ***Used as conduit rack or spacer for rigid conduit, IMC or EMT.***
- ***Ideal for schools, hospitals, industrial and commercial jobs.***
- ***Galvanized steel.***



Easy Snap Grommet

Cat. No.	Fig. No.	Description	Pkg. Per Box
1300	1	Plastic bushing for metal stud 1" trade size opening (1 11/32")	100
1216-EN	2	Twisted universal bushing for metal stud	50

Fig. 1



Fig. 2

Features

- ***Fit any size or shape metal stud hole.***
- ***Provides complete 360° protection for cable.***

© 2003 Thomas & Betts Corporation. Specifications are subject to change without notice.



Through Stud Cable/Conduit Support

Cat. No.	Fig. No.	Description	Pkg. Per Box
SSF-SAB-C1/2 3/4	1	½" or ¾" finger close conduit clip	25
SSF-SAB-C3/8	1	Finger close conduit clip 14-2 thru 12-3 MC/AC cable and ⅜" conduits	25
SSF-SAB-S1/2	2	Snap-in conduit clip – ½" conduit	25
SSF-SAB-S3/4	2	Snap-in conduit clip – ¾" conduit	25
SSF-SP1	3	Supports up to 1" conduit	100

Features

- ***A quick means of support for horizontal runs of conduits or MC/AC through metal stud.***
- ***Installs easily with a screw gun.***
- ***SSF-SPI allows ENT conduit and MC/AC cable to be easily pulled through metal stud.***



Fig. 1



Fig. 2



Fig. 3



Low Voltage Mounting Brackets – Screw on Support

Cat. No.	Fig. No.	Description	Pkg. Per Box
SSF-SLV	1	Old work or new work low voltage bracket	100
VN1*	2	Non-metallic single gang new work low voltage bracket	50
VN2*	-	Non-metallic two gang new work low voltage bracket	50
VW1*	3	Non-metallic single gang old work low voltage bracket	50
VW2*	-	Non-metallic two gang old work low voltage bracket	50
WBF-1	4	Low voltage mounting bracket with screws	100

Features

- ***Eliminates the need for an electrical box when installing low voltage Class 2 wiring.***
- ***For old work or new work.***



Fig. 1



Fig. 2



Fig. 3



Fig. 4

© 2003 Thomas & Betts Corporation. Specifications are subject to change without notice. **www.tnb.com**



Features

- *Quickly attaches box through finished drywall.*
- *For up to 1½" thick drywall.*
- *New 820D shipped in one piece break-apart design.*
- *Easy to install.*

Old Work Box Support

Cat. No.	Fig. No.	Description	Pkg. Per Box
820D	1	Old work switch box steel mounting holder	100 sets



Fig. 1



Features

- *Use for oversided drywall openings.*
- *Prevents broken cover plates.*
- *Stops device from being pushed back in wall.*
- *Makes floating device rigid.*

Device Leveler and Retainer

Cat. No.	Fig. No.	Description	Pkg. Per Box
SSF-SR	1	Single gang device leveler and retainer	100



Fig. 1



Features

- *Protects cable(s) from damage when installing drywall or paneling.*
- *No nails or screws required.*
- *Fits all stud sizes.*
- *Both products meet requirements for NEC 300-4d.*
- *ST66 legs are crimped with pliers to stud to provide secure fit.*

Protector Plates

Cat. No.	Fig. No.	Description	Pkg. Per Box
SSF-ST66	1	Protector plate for metal stud	100
66EP-SC	2	Protector plate for wood stud	100



Fig. 1



Fig. 2

© 2003 Thomas & Betts Corporation. Specifications are subject to change without notice.

© 2003 Thomas & Betts Corporation. Specifications are subject to change without notice.

Steel City®

Spring Steel Fasteners

Acoustical Tee

Pages F35-F40



Page F36



Page F36



Page F36



Page F36



Page F36



Page F36



Page F37



Page F37



Page F37



Page F37



Page F37



Page F37



Page F37



Page F38



Page F38

Page F38



Page F39



Page F39



Page F39



Page F39



Page F40



Page F40



Page F40



Page F40



Page F40

Thomas&Betts

Steel City®

Acoustical Tee



Features

- *Allows positioning of fixture or box anywhere across a 24" span.*
- *Hanger comes complete with THC box mounting clip and ¼"-20 screw.*
- *Drop wire holes in tee clips and the clip allows support from main structure.*
- *Part includes dual height feature which allows 1½" deep electrical box to be mounted flush with tile or offset ¾" for plaster ring.*
- *The series includes bar hanger THC clip and ¼"-20 x 38" screw.*
- *The clip is furnished with ¼"-30 x ⅜" screw.*

Snap On Box Hanger

Cat. No.	Fig. No.	Description	Pkg. Per Box
SSF-TH12	1	T-grid box hanger, 12" span	25
SSF-TH20	1	T-grid box hanger, 20" span	25
SSF-TH24	1	T-grid box hanger, 24" span	25
SSF-TH30	1	T-grid box hanger, 30" span	25
SSF-TH24A	2	8" height adjustable, 24" span	25
SSF-THC	3	Snap on fixture/box hanger mounting clip	100
SSF-MH1/4-3/8	4	¼"-20 x ⅜" bolt combo head	100



Fig. 1



FIg. 2



Fig. 3



Fig. 4



Features

- *Reduces installation time.*
- *Hanger comes complete with bar riveted to acoustical tee clip, additional acoustical tee clip and ¼"-20 screw.*
- *Position of fixture adjustable with span.*
- *Solid bar for sturdier installation.*
- *Installs easily with a screwdriver.*

Suspension Bars for Lightolier® Calculite® Series Fixtures*

Cat. No.	Fig. No.	Description	Pkg. Per Box
SSF-TL24	1	Suspension bars for Lightolier Calculite	10

*Note: Lightolier and Calculite are registered trademarks of Lightolier, and GENLYTE Company.

Fig. 1

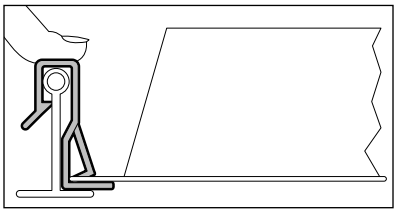

Features

- *Enlarged tab allows for easy positioning of the clip over the tee bar.*
- *Gives a positive method of supporting troffers and lay-ins.*
- *Fits round or rectangular head tee bar.*
- *No installation tools required.*

Light Fixture Support Clips

Cat. No.	Fig. No.	Description	Pkg. Per Box
SSF-TFC	**1**	Light fixture support clip	100



Fig. 1

Thomas&Betts

© 2003 Thomas & Betts Corporation. Specifications are subject to change without notice.

Steel City®

Acoustical Tee



Features

- *Easy to assemble, one piece construction.*
- *Provides independent support for fixtures.*
- *Washer wing nut included.*
- *Static load limit 65 lbs.*
- *No installation tools required.*

Independent Support Clips

Cat. No.	Fig. No.	Description	Static Load Limit	Pkg. Per Box
SSF-TS5/8	1	Grid size 15⁄16", stud length 5⁄8"	65	100
SSF-TS2	1	Grid size 15⁄16", stud length 2"	65	100
SSF-TS1 1/2	1	Grid size 15⁄16", stud length 1½"	65	100



Fig. 1



Features

- *Provides supporting conduit and outlet boxes above acoustical tee bar.*
- *TCH and TCV Series provide both horizontal and vertical support.*
- *Available with ¼"-20 thread impression or plain hole.*
- *No installation tools required.*

Electrical Component Supports

Cat. No.	Fig. No.	Description	Pkg. Per Box
SSF-TCH	1	Top mount T-bar fastener with plain hole	100
SSF-TCHT	1	Top mount T-bar fastener with ¼"-20 thread impression	100
SSF-TCH-S1/2	2	Acoustical clip with top mounted snap-in conduit clip for ½" conduit	25
SSF-TCH-S3/4	2	Acoustical clip with top mounted snap-in conduit clip for ¾" conduit	25
SSF-TCH-S1	2	Acoustical clip with top mounted snap-in conduit clip for 1" conduit	25
SSF-TCH-C1/2 3/4	3	Acoustical clip with top mounted conduit clip for ½"-¾" conduit	25
SSF-TCV	4	Side mount T-Bar fastener with plain hole	100
SSF-TCVT	4	Side mount T-Bar fastener with ¼"-20 thread impression	100
SSF-TCV-S1/2	5	Acoustical clip with side mounted conduit clip for ½" conduit	25
SSF-TCV-S3/4	5	Acoustical clip with side mounted conduit clip for ¾" conduit	25
SSF-TCV-S1	5	Acoustical clip with side mounted conduit clip for 1" conduit	25
SSF-TCV-C1/2 3/4	6	Acoustical clip with side mounted conduit clip for ½"-¾" conduit	25



Fig. 1



Fig. 2



Fig. 3



Fig. 4



Fig. 5



Fig. 6

Thomas&Betts

© 2003 Thomas & Betts Corporation. Specifications are subject to change without notice.



Adjustable Box and Conduit Bracket

Cat. No.	Fig. No.	Description	Pkg. Per Box
SSF-TA7	1	Adjustable box and conduit support for T-grid	50
SSF-TA7-S1/2	2	For T-grid, with ½" snap-in conduit clip	25
SSF-TA7-S3/4	2	For T-grid, with ¾" snap-in conduit clip	25
SSF-TA7-S1	2	For T-grid, with 1" snap-in conduit clip	25

*Note - For preset location, add location number per Figure 3.

Features

- ***Supports boxes and conduit above acoustical tee with height adjustments from 4¼" through 7¼" .***
- ***Attaches to conduit clips with thread impressions at required height.***
- ***Assemblies available for pre-set conduit locations.***
- ***TA7-S assemblies are furnished with the TA7 bracket, the conduit clip with thread impressions and ¼"-20 cap screw.***



Fig. 1



Fig. 2



Fig. 3*

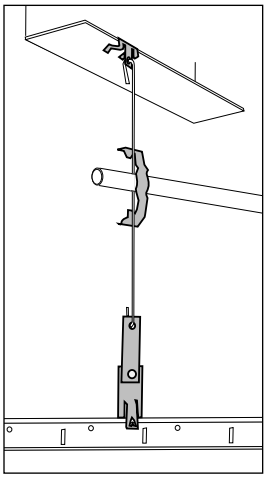

Drop Rod Stablizer

Cat. No.	Fig. No.	Description	Pkg. Per Box
SSF-TCVYL	1	Drop wire stabilizer, #12 through #8 drop wire	25
SSF-TCVYL-FBUC	2	Drop wire stabilizer, #8 drop wire through ⅜" rod	25

Features

- ***Provides attachment for dedicated electrical drop wire.***
- ***Yellow painted finish for easy identification.***
- ***Compliant with NEC 300-11a for supporting end of dedicated drop wire.***



Fig. 1

Fig. 2

© 2003 Thomas & Betts Corporation. Specifications are subject to change without notice. www.tnb.com

Steel City®

Acoustical Tee



Features

- *Will not damage acoustical tee.*
- *All T-clips with ¼"-20 studs are furnished with a TWN-¼" wing nut.*
- *All T-clips with #8-32 studs are furnished with a #8-32 pal nut.*
- *Available in black or white painted finish.*
- *Static load limit 25 lbs.*

Acoustical Tee Twist-on Clip for Fixture Support

Cat. No.	Fig. No.	Description	Static Load Limit	Pkg. Per Box
SSF-T9T5/8	1	¼"-20 x ⅝" stud, ⅜" tee	50	25
SSF-T9T5/8WH	1	¼"-20 x ⅝" stud, ⅜" tee, white	50	25
SSF-T9T8-5/8	1	#8-32 x ⅝" stud, ⅜" tee	50	25
SSF-T9T8-5/8WH	1	#8-32 x ⅝" stud, ⅜" tee, white	50	25
SSF-T9T8-7/16	1	#8-32 x 7⁄16" stud, ⅜" tee	50	25
SSF-TWN1/4	2	Impression washer wing nut, ¼"-20 thread	50	100



Fig. 1



Fig. 2

F

Steel City®



Features

- *Supports electrical fixtures from acoustical tee bar 9⁄16" or 15⁄16" wide.*
- *¼"-20 stud – ⅝", 1½", 2" or 3" long.*
- *All T-clips with ¼"-20 studs are furnished with a TWN-¼" wing nut.*
- *All T-clips with #8-32 studs are furnished with a #8-32 pal nut.*
- *No installation tools required.*

Acoustical Tee "Twist On" Fixture Support

Cat. No.	Fig. No.	Description	Static Load Limit	Pkg. Per Box
SSF-T15T5/8	1	¼-20 x ⅝" stud, 15⁄16" tee	50	25
SSF-T15T5/8WH	1	¼-20 x ⅝" stud, 15⁄16" tee, white finish	20	25
SSF-T15T1 1/2	1	¼-20 x 1½" stud, 15⁄16" tee	50	25
SSF-T15T1 1/2WH	1	¼-20 x 1½" stud, 15⁄16" tee, white finish	20	25
SSF-T15T2	1	¼-20 x 2" stud, 15⁄16" tee	50	25
SSF-T15T3	1	¼-20 x 3" stud, 15⁄16" tee	50	25
SSF-T15T8-5/8	1	#8-32 x ⅝" stud, 15⁄16" tee	50	25
SSF-T15T8-5/8WH	1	#8-32 x 3" stud, 15⁄16" tee, white finish	20	25
SSF-T15T8-7/16	1	#8-32 x 7⁄16" stud, 15⁄16" tee	50	25
SSF-T15T8-7/16WH	1	#8-32 x 7⁄16" stud, 15⁄16" tee, white finish	20	25
SSF-T15TSH	2	Acoustical tile sign hanger attachment, white finish	20	25



Fig. 1



Fig. 2

Thomas&Betts

© 2003 Thomas & Betts Corporation. Specifications are subject to change without notice.



Features

- *Supports fluorescent light fixtures from s-hooks and jack chain.*
- *Supports 50 lbs. ultimate static load limit.*
- *No need to modify jack chain for fixture installation.*

Light Fixture Hanger

Cat. No.	Fig. No.	Description	Static Load Limit	Pkg. Per Box
SSF-TV	1	Fluorescent light fixture hanger	50	100
CI-8930	2	Fluorescent light fixture hanger	115	100
CI-8932	3	Fluorescent light fixture hanger	115	100



Fig. 3



Fig. 2



Fig. 1



Features

- *Order s-hooks and jack chain with your Spring Steel orders to save on freight, energy, and purchase orders.*
- *S-hook supports 29 lbs. static load limit.*

S Hook and Jack Chain

Cat. No.	Fig. No.	Description	Static Load Limit	Pkg. Per Box
CI-8905	1	S-Hook	29	100
CI-8912	2	Jack Chain	–	50



Fig. 1

Fig. 2

© 2003 Thomas & Betts Corporation. Specifications are subject to change without notice. **www.tnb.com**

Steel City®

Spring Steel Fasteners

Low Voltage/Datacom

Pages F41-F46



Page F42



Page F42



Page F42



Page F42



Page F42



Page F42



Page F43



Page F43



Page F43



Page F43



Page F43



Page F43



Page F44



Page F44



Page F44



Page F45



Page F45



Page F45



Page F45



Page F45



Page F45



Page F46



Page F46



Page F46



Page F46

Thomas&Betts



Cable Support Hook

Cat. No.	Fig. No.	Description	Static Load Limit	Pkg. Per Box
SSF-VJ1 5/16C	1	Wide base cable support hook, 1⁵⁄₁₆" diameter	100	50
SSF-VJ2C	1	Wide base cable support hook, 2" diameter	100	50
SSF-VJ1 5/16*	2	Wide base cable support hook, 1⁵⁄₁₆" diameter	100	50
SSF-VJ2*	2	Wide base cable support hook, 2" diameter	100	50
SSF-VJ4	2	Wide base cable support hook, 4" diameter	100	50
SSF-VB10	3	Hanger bar	100	100
SSF-VJ1 5/16-BC	4	Cable support J-hook, 1⁵⁄₁₆" diameter clamp to flanges up to ½" thick	100	25
SSF-VJ2-BC	4	Cable support J-hook, 2" diameter clamp to flanges up to ½" thick	100	25
SSF-VJ1 5/16-BC-AB	5	Cable support J-hook, 1⁵⁄₁₆" diameter clamp to flanges up to ½" thick	100	25
SSF-VJ2-BC-AB	5	Cable support J-hook, 2" diameter clamp to flanges up to ½" thick	100	25
SSF-VJ1 5/16-F1/4	6	Cable support hook, 1⁵⁄₁₆" diameter clip to ⅛" to ¼" flange	100	25
SSF-VJ1 5/16-F1/2	6	Cable support hook, 1⁵⁄₁₆" diameter clip to ⅝" to ½" flange	100	25
SSF-VJ1 5/16-F3/4	6	Cable support hook, 1⁵⁄₁₆" diameter clip to ⅝" to ¾" flange	100	25
SSF-VJ2-F1/4	6	Cable support hook, 2" diameter clip to ⅛" to ¼" flange	100	25
SSF-VJ2-F1/2	6	Cable support hook, 2" diameter clip to ⅝" to ½" flange	100	25
SSF-VJ2-F3/4	6	Cable support hook, 2" diameter clip to ⅝" to ¾" flange	100	25

*Note – For assembly hardware, see page F47.

Features

- ***Extra-wide base provides cable support on a flat surface, eliminating kinking, bending and crimping.***
- ***Accommodates category 5, fiber optic cable and innerduct.***
- ***Available in 1⅝" and 2" diameter size cable support hook.***
- ***Complies with UL, CSA, NEC and EIA/TIA requirements for structured cabling systems.***
- ***Supports 50 lbs. per hook static load limit.***
- ***VJ series cable support hook can be snapped together with VB-10 hanger bracket without hardware or tools.***



Fig. 1



Fig. 2



Fig. 3



Fig. 4



Fig. 5



Fig. 6

© 2003 Thomas & Betts Corporation. Specifications are subject to change without notice. **www.tnb.com**



Features

- ***Extra-wide base provides cable support on a flat surface, eliminating kinking, bending and crimping.***
- ***Accommodates category 5, fiber optic cable and innerduct.***
- ***Available in 1⅝" and 2" diameter size cable support clips.***
- ***Complies with UL, CSA, NEC and EIA/TIA requirements for structured cabling systems.***
- ***Supports 100 lbs. per hook static load limit.***
- ***VJ series cable support clips can be snapped together with VB-10 hanger bracket without hardware or tools.***

Cable Support Hook

Cat. No.	Fig. No.	Description	Static Load Limit	Pkg. Per Box
SSF-VJ1 5/16-UC	1	Cable support hook, 1⅝" diameter clip to #12 drop wire thru ⅜" rod	100	25
SSF-VJ2-UC	1	Cable support hook, 2" diameter clip to #12 drop wire thru ⅜" rod	100	25
SSF-VJ1 5/16-AB	2	Cable support hook, 1⅝" diameter clip rotates 360°	100	25
SSF-VJ2-AB	2	Cable support hook, 2" diameter clip rotates 360°	100	25
SSF-VJ1 5/16-A7	3	Cable support hook, 1⅝" diameter clip to acoustical tee	100	25
SSF-VJ2-A7	3	Cable support hook, 3" diameter clip to acoustical tee	100	25
SSF-VJ1 5/16-H1/4-AB	4	Cable support hook, 1⅝" diameter clip to ⅛" to ¼" flange, rotates 360°	100	25
SSF-VJ1 5/16-H1/2-AB	4	Cable support hook, 1⅝" diameter clip to 5⁄16" to ½" flange, rotates 360°	100	25
SSF-VJ1 5/16-H3/4-AB	4	Cable support hook, 1⅝" diameter clip to 9⁄16" to ¾" flange, rotates 360°	100	25
SSF-VJ2-H1/4-AB	4	Cable support hook, 2" diameter clip to ⅛" to ¼" flange, rotates 360°	100	25
SSF-VJ2-H1/2-AB	4	Cable support hook, 2" diameter clip to 5⁄16" to ½" flange, rotates 360°	100	25
SSF-VJ2-H3/4-AB	4	Cable support hook, 2" diameter clip to 9⁄16" to ¾" flange, rotates 360°	100	25
SSF-VJ1 5/16-V1/4	5	Cable support hook, 1⅝" diameter clip to 3⁄32" to 9⁄32" vertical flange	100	25
SSF-VJ2-V1/4	5	Cable support hook, 2" diameter clip to 3⁄32" to 9⁄32" vertical flange	100	25
SSF-VJ1 5/16-A1/4	6	Cable support hook, 1⅝" diameter clip to ⅛" to ¼" Z purlin	100	25
SSF-VJ2-A1/4	6	Cable support hook, 2" diameter clip to ⅛" to ¼" Z purlin	100	25

*Note – For assembly hardware, see page F47.



Fig. 1



Fig. 2



Fig. 3



Fig. 4



Fig. 5



Fig. 6

© 2003 Thomas & Betts Corporation. Specifications are subject to change without notice.



Features

- *Attachment of high performance cable such as Fiber Optic and CAT 5 cables because of the wide strap used of support of the cable bundle.*
- *Pre-assembled part combinations allow quick installation to vertical and horizontal flanges, purlin, drop wire, threaded rod, and acoustical tee bar.*
- *Can be used for single or multiple bundles.*
- *Fully adjustable around bundle, fully encompasses cabling.*
- *Wide, firm bearing surface to support wire.*

Deltec Tie Cable Support Fasteners

Cat. No.	Fig. No.	Description	Pkg. Per Box
SSF-VT13-F1/4	1	13" Strap with ¼" flange clip attachment	25
SSF-VT13-F1/2	1	13" Strap with ½" flange clip attachment	25
SSF-VT13-BC	2	13" Strap with beam clamp attachment	25
SSF-VT13-UC	3	13" Strap with utility clip attachment	25
SSF-VT13-AB	4	13" Strap with angle bracket attachment	25
SSF-VT13-V1/4	5	13" Strap with vertical flange clip attachment	25
SSF-VT13-A1/4	6	13" Strap with Z purlin clip attachment	25
SSF-VT13-A7	7	13" Strap with TA7 acoustical tee bar mounting attachment	25
SSF-VT27-F1/4	1	27" Strap with ¼" flange clip attachment	25
SSF-VT27-F1/2	1	27" Strap with ½" flange clip attachment	25
SSF-VT27-BC	2	27" Strap with beam clamp attachment	25
SSF-VT27-UC	3	27" Strap with utility clip attachment	25
SSF-VT27-AB	4	27" Strap with angle bracket attachment	25
SSF-VT27-V1/4	5	27" Strap with vertical flange clip attachment	25
SSF-VT27-A1/4	6	27" Strap with Z purlin clip attachment	25
SSF-VT27-A7	7	27" Strap with TA7 acoustical tee bar mounting attachment	25
CSS-H	–	Strap mounting bracket	25
CSS-135	–	Additional 13½" Strap ties	25
CSS-270	–	Additional 27" Strap ties	25



Fig. 1

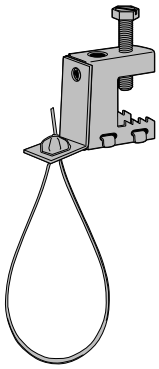

Fig. 2



Fig. 3

Fig. 4



Fig. 5



Fig. 6



Fig. 7

Thomas&Betts

© 2003 Thomas & Betts Corporation. Specifications are subject to change without notice.



Features

- *Attachment of all types of MC/AC cable and high performance cable such as Fiber Optic and CAT 5 cables.*
- *Pre-assembled part combinations allow quick installation to vertical and horizontal flanges, purlin, drop wire, threaded rod, and acoustical tee bar.*
- *The hook and loop type strap makes mounting and adjustment quick and easy.*
- *Perfect product for applications where easy access to the cable bundle after installation is required.*

Fig. 1

Loop Tie Cable Support Fasteners

Cat. No.	Fig. No.	Description	Pkg. Per Box
FO350-40	1	Addditional 13" Loop Tie straps	25
FO220-40	1	Additional 9" Loop Tie straps	25
SSF-VL13-F1/4	2	13" Loop Tie with ¼" flange clip attachment	25
SSF-VL13-F1/2	2	13" Loop Tie with ½" flange clip attachment	25
SSF-VL13-BC	3	13" Loop Tie with beam clamp attachment	25
SSF-VL13-UC	4	13" Loop Tie with utility clip attachment	25
SSF-VL13-AB	5	13" Loop Tie with angle bracket attachment	25
SSF-VL13-V1/4	6	13" Loop Tie with vertical flange clip attachment	25
SSF-VL13-A1/4	7	13" Loop Tie with Z purlin clip attachment	25
SSF-VL13-CH	8	13" Loop Tie with TCH acoustical tee bar mounting attachment	25



Fig. 2



Fig. 3



Fig. 4



Fig. 8



Fig. 5



Fig. 6



Fig. 7

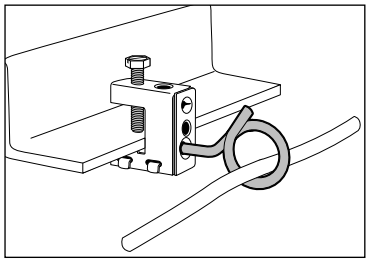

Features

- *Bridle rings can be combined with these other Steel City Spring Steel Fastener products: BBC Beam Clamp, BH Series Flange Clips, and TC Series Acoustical Tee.*
- *Bright zinc electro-plated finish.*



Fig. 1



Fig. 2

Threaded Bridle Ring

Cat. No.	Fig. No.	Eye Dia.	Thread	Specifications	Max. Load (lbs.)	Pkg. Per Box
SSF-VR3/4A	1	¾"	#10-24	Machine Screw Bridle Ring	50	100
SSF-VR1 1/4A	1	1¼"	#10-24	Machine Screw Bridle Ring	50	100
SSF-VR1 3/4A	1	1¾"	#10-24	Machine Screw Bridle Ring	50	100
SSF-VR1 1/4B	1	1¼"	1/4-20	Machine Screw Bridle Ring	50	100
SSF-VR1 5/8B	1	1⅝"	1/4-20	Machine Screw Bridle Ring	50	100
SSF-VR 2B	1	2"	1/4-20	Machine Screw Bridle Ring	50	100
SSF-VR 4B	1	4"	1/4-20	Machine Screw Bridle Ring	50	100
SSF-VR1 5/8D	2	1⅝"	#14	Wood Screw Bridle Ring	75	100
SSF-VR1 1/4D	2	1¼"	#14	Wood Screw Bridle Ring	75	100
SSF-VR3E	2	3"	#18	Wood Screw Bridle Ring	75	100
SSF-VR7/8C	2	⅞"	#10	Wood Screw Bridle Ring	50	100

*These sizes have longer nails for greater load carrying capacity.

© 2003 Thomas & Betts Corporation. Specifications are subject to change without notice.



Low Voltage Mounting Brackets – Screw on Support

Cat. No.	Fig. No.	Description	Pkg. Per Box
SSF-SLV	1	Old work or new work low voltage bracket	100
VN1*	2	Non-metallic single gang new work low voltage bracket	50
VN2*	–	Non-metallic two gang new work low voltage bracket	50
VW1*	3	Non-metallic single gang old work low voltage bracket	50
VW2*	–	Non-metallic two gang old work low voltage bracket	50
WBF-1	4	Low voltage mounting bracket with screws	100

*VN products available.

Features

- ***Eliminates the need for an electrical box when installing low voltage Class 2 wiring.***
- ***For old work or new work.***



Fig. 1



Fig. 2



Fig. 3



Fig. 4

© 2002 Thomas & Betts Corporation. Specifications are subject to change without notice.

Steel City®

Spring Steel Fasteners

Fastener Accessories

Pages F47-F50



Page F48



Page F48



Page F48



Page F48



Page F48



Page F48



Page F48



Page F49



Page F49



Page F49



Page F49



Page F50



Page F50

Thomas&Betts



Miscellaneous Hangers

Cat. No.	Fig. No.	Description	Static Load Limit	Pkg. Per Box
SSF-HB8	1	Rod & wire hanger, #8 wire	160 lbs.	100
SSF-HB1/4	1	Rod & wire hanger, ¼" plain rod	160 lbs.	100
SSF-HB3/8	1	Rod & wire hanger, ⅜" plain rod	160 lbs.	100
SSF-HA1/4T	2	Rod & wire hanger with thread impression ¼" threaded rod	160 lbs.	100
SSF-HA3/8	2	Rod & wire hanger ¼"-⅜" threaded rod, nuts required	160 lbs.	100
SSF-HA3/8T	2	Rod & wire hanger with thread impression ⅜" threaded rod	160 lbs.	100

Features

- ***Rod hanger available for 1¼" and ⅜" threaded rod with or without thread impression.***



Fig. 1



Fig. 2



Miscellaneous Hangers

Cat. No.	Fig. No.	Description	Static Load Limit	Pkg. Per Box
SSF-HOB	1	Offset bracket with ¼" hole	160	100
SSF-HAB	2	Angle bracket with ¼" hole	160	100
SSF-HSAB	3	Short angle bracket with ¼" hole	160	100
SSF-HFB	4	Flat bracket with ¼" hole	160	100
SSF-TA7	5	For T-grid, with 1" snap-in conduit clip		100

Features

- ***Rod hanger available for ¼" and ⅜" threaded rod with or without thread impression.***
- ***Various steel brackets with 1¼" holes and galvanized finish.***



Fig. 1



Fig. 2



Fig. 3



Fig. 4

Fig. 5

© 2003 Thomas & Betts Corporation. Specifications are subject to change without notice. **www.tnb.com**



Pipe Sleeve Positioner

Cat. No.	Fig. No.	Sleeve Dia.	Description / Wall Thickness	Pkg. Per Box
SSF-MPS	1	All dia.	Pipe sleeve positioner, 5⁄16" and under	100
SSF-MPS	1	2"-6"	Pipe sleeve positioner, Schedule 40 Pipe	100
SSF-BF1/2	2	6"	Pipe sleeve positioner, Schedule 80 Pipe	100
SSF-BF1/2	2	8"-10"	Pipe sleeve positioner, Schedule 40 Pipe	100
SSF-BF3/4	2	9"-14"	Pipe sleeve positioner, Schedule 80 Pipe	100

Features

- ***Provides secure positioning of pipe sleeve for concrete pouring of wall and floor forms.***
- ***Accommodates up to Schedule 80 pipe wall thicknesses.***
- ***Installs easily with a hammer.***



Fig. 1



Fig. 2



S Hook and Jack Chain

Cat. No.	Fig. No.	Description	Static Load Limit	Pkg. Per Box
CI-8905	1	S-Hook	29	100
CI-8912	2	Jack Chain	–	50

Features

- ***Order s-hooks and jack chain with your Spring Steel orders to save on freight, energy, and purchase orders.***
- ***S-hook supports 29 lbs. static load limit.***



Fig. 1

Fig. 2

© 2003 Thomas & Betts Corporation. Specifications are subject to change without notice.



Features

- *Supports signal reference grid wires below computer room floors.*
- *One fastener supports wire sizes #8 stranded (.146) to #4 stranded (.232).*
- *Fits post sizes ¾" to 1" round or square.*
- *Slots in fastener grip wire provides positive contact with post.*
- *Clamps grid wire directly to post allowing a low resistance connection across bare metal contacts.*
- *Installs easily with a screw driver or nut driver.*

Signal Reference Grid Wire Clamp

Cat. No.	Fig. No.	Description	Pkg. Per Box
3900	1	Signal reference grid wire clamp	100



Fig. 1



Features

- *Easy method to hang items below decking.*
- *Requires pre-drilled hole ¼" diameter.*
- *Works for material thicknesses up to ⅛".*

Deck Hanger

Cat. No.	Fig. No.	Description	Pkg. Per Box
SSF-MNH	1	Deck Hanger Clip	100



Fig. 1

© 2003 Thomas & Betts Corporation. Specifications are subject to change without notice. www.tnb.com

Steel City®

Spring Steel Fasteners

Conduit Hangers, Strut Accessories, Hardware

Pages F51-F56

Page F52


Page F52


Page F52


Page F52


Page F52


Page F52


Page F53

Page F53


Page F53


Page F54


Page F54


Page F55


Page F56


Page F56


Page F56


Page F56


Page F56


Page F56

Thomas&Betts



Features

- *Accommodates ½" through 4" EMT or rigid conduit.*
- *Can be used for either vertical or horizontal installation.*
- *6HTB Series have a built-in nut so there are less parts to handle or drop.*
- *Installs easily with a screwdriver.*

Fig. 1

Fig. 2

6H Series Conduit and Pipe Hangers

With Bolt Cat. No.	With Bolt Fig. No.	Without Bolt Cat. No.	Without Bolt Fig. No.	EMT	Rigid Conduit or Pipe	Qty. per Box
6H0-B	1	**6H0**	2	½	⅜-½	100
6H0-TB	3	**6H0**	4	½	⅜-½	100
6H1-B	1	**6H1**	2	¾	¾	100
6H1-TB	3	**6H1**	4	¾	¾	100
6H2-B	1	**6H2**	2	1	1	100
6H2-TB			4	1	1	100
6H2 1/2-B	1	**6H2 1/2**	2	1¼	–	100
6H2 1/2-TB			4	1¼	–	100
6H3-B	1	**6H3-SC**	2	1½	1¼	100
6H3-TB			4	1½	1¼	100
6H4-B	1	**6H4**	2	–	1½	100
6H4-TB			4	–	1½	100
6H5-B	1	**6H5**	2	2	2	100
6H5-TB			4	2	2	100
6H6-B	1	**6H6**	2	2½	2½	100
6H7-B	1	**6H7**	2	3	3	100
6H8-B	1	**6H8**	2	3½	3½	100
6H9-B	1	**6H9**	2	4	4	100

Add SS suffix to part number for stainless steel.

Load rating is 500 lbs. with a safety factor of 3. Available with or without closure bolt.
Standard finishes: electrogalvanized and Type 302 Stainless Steel.



Fig. 3



Fig. 4



Features

- *Supports threaded rod, threaded bridle rings and electrical boxes.*
- *Bright zinc plating.*
- *Supports 100 lbs. static load limit.*



Fig. 1



Fig. 2

Beam Clamps–Malleable Iron, Electroplated Finish

Cat. No.	Fig. No.	Description	Static Load Limit	Pkg. Per Box
BC1-TB	1	Steel beam clamp, ¼"-20 threaded openings, fits flanges up to ⅝" thick	75	50
BC2-TB	1	Steel beam clamp, ⅝"-18 threaded openings, fits flanges up to ¾" thick	320	50
510	2	Malleable iron beam clamp, ¼"-20 threaded openings, fits flanges up to ⅝" thick	400	100
511-SC	2	Malleable iron beam clamp, 10"-24 threaded openings, fits flanges up to ⅝" thick	400	100
500-SC	2	Malleable iron beam clamp, ¼"-20 threaded openings, fits flanges up to 1⁵⁄₁₆" thick	450	100
509	2	Malleable iron beam clamp, 10"-24 threaded openings, fits flanges up to ⁵⁄₁₆" thick	375	100
501	2	Malleable iron beam clamp, ⁵⁄₁₆"-18 threaded openings, fits flanges up to ⅞" thick	800	100
502	2	Malleable iron beam clamp, ⅜"-16 threaded openings, fits flanges up to 1" thick	1300	100
503-SC	2	Malleable iron beam clamp, ½"-13 threaded openings, fits flanges up to 1" thick	1300	100
507	2	Malleable iron beam clamp, ½"-13 threaded openings, fits flanges up to 1⅜" thick	1700	100
508	2	Malleable iron beam clamp, ½"-13 threaded openings, fits flanges up to 2⅛" thick	1700	100

‡Safety Factor of 3. Loan Ratings based on bottom hole of Beam Clamp.
CSA File No. LR-52208

Thomas&Betts

© 2003 Thomas & Betts Corporation. Specifications are subject to change without notice. www.tnb.com



Fig. 1

Fig. 2



Fig. 3

Beam Clamps

Cat. No.	Fig. No.	Dimension in Inches: O.D. of Conduit or Pipe	Dimension in Inches: Nom. Conduit or Pipe Size	Qty. per box
RCS Clamp-Steel				
RCS-1/2	1	.840	½	50
RCS-3/4	1	1.050	¾	50
RCS-1	1	1.315	1	100
RCS-1-1/4	1	1.660	1¼	100
RCS-1-1/2	1	1.900	2	100
RCS-2	1	2.375	2	100
RC Clamp-Malleable Iron				
RC-3/8	1	.675	⅜	50
RC-1/2	1	.840	½	50
RC-3/4	1	1.050	¾	50
RC-1	1	1.315	1	100
RC-1-1/4	1	1.660	1¼	100
RC-1-1/2	1	1.900	1½	100
RC-2-SC	1	2.375	2	100
RC-2-1/2	1	2.875	2½	100
RC-3	1	3.500	3	100
RC-3-1/2	1	4.000	3½	100
RC-4-SC	1	4.500	4	100
EC Clamp-Malleable Iron				
EC-1/2	2	.840	½	50
EC-3/4	2	1.050	¾	50
EC-1	2	1.315	1	100
EC-1-1/4	2	1.660	1¼	100
EC-1-1/2	2	1.900	1½	100
EC-2	2	2.375	2	100
EC-2-1/2	2	2.875	2½	100
EC-3	2	3.500	3	100
PC Clamp-Malleable Iron				
PC-3/8	3	.675	⅜	50
PC-1/2	3	.840	½	50
PC-3/4	3	1.050	¾	50
PC-1	3	1.315	1	100
PC-1-1/4	3	1.660	1¼	100
PC-1-1/2	3	1.900	1½	100
PC-2	3	2.375	2	100
PC-2-1/2	3	2.875	2½	100
PC-3	3	3.500	3	100
PC-3-1/2	3	4.000	3½	100
PC-4	3	4.500	4	100

© 2003 Thomas & Betts Corporation. Specifications are subject to change without notice.

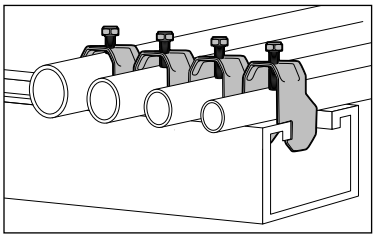

Features

- *One piece installation*
- *No screws or bolts to drop.*
- *Installs quickly and easily.*
- *Heavy duty construction with a bright zinc finish.*
- *Size ½" to 4" conduits.*
- *Requires only a screwdriver for installation.*



Fig. 1



Fig. 2

One Piece Strut Clamp

Cat. No.	Fig. No.	EMT Size	Rigid Size	Cable O.D. (in.)	Description	Pkg. Per Box
CH118-055EG	1	⅜	–	0.40-0.55	Conduit to strut clamp	100
CH118-081EG	1	½	⅜	0.50-0.70	Conduit to strut clamp	100
CH118-110EG	1	¾	½	0.60-.090	Conduit to strut clamp	100
CH118-125EG	1	1	¾	0.85-1.10	Conduit to strut clamp	100
CH118-135EG	1	1¼	1	1.10-1.40	Conduit to strut clamp	100
CH118-175PG	1	1½	1¼	1.40-1.75	Conduit to strut clamp	100
CH118-205EG	1	2	1½	1.75-2.00	Conduit to strut clamp	100
CH118-250EG	1	–	2	2.00-2.50	Conduit to strut clamp	100
CH118-300EG	1	2½	2½	2.50-3.00	Conduit to strut clamp	25
CH118-375EG	1	3	3	2.60-3.70	Conduit to strut clamp	25
CH118-425EG	1	3½	3⅜	3.50-4.10	Conduit to strut clamp	10
CH118-475EG	1	4	4	3.90-4.60	Conduit to strut clamp	10
CX118-081EG	2	½	⅜	–	Conduit to strut clamp without saddle	100
CX118-110EG	2	¾	½	–	Conduit to strut clamp without saddle	100
CX118-125EG	2	1	¾	–	Conduit to strut clamp without saddle	100
CX118-135EG	2	1¼	1	–	Conduit to strut clamp without saddle	100
CX118-175PG	2	1½	1¼	–	Conduit to strut clamp without saddle	100
CX118-205EG	2	2	1½	–	Conduit to strut clamp without saddle	100

Thomas&Betts
© 2003 Thomas & Betts Corporation. Specifications are subject to change without notice. www.tnb.com



Features

- *Straps are pre-assembled for easy handling and sorting.*
- *Straps secure conduit and pipe to all types of strut.*
- *Steel straps with GoldGalv zinc finish. (Also available in silver zinc finish - EG suffix)*



Fig. 1

700 Straps for EMT

Cat. No.	EMT, Rigid Conduit or Pipe Size	O.D. Size (In.)	Steel Strap Thickness	Design Load (lbs.)	Std. Ctn.
700-3/8-STR	3/8	0.577	14 ga.	750	100
700-1/2-STR	1/2	0.706	14 ga.	750	100
700-3/4-STR	3/4	0.922	14 ga.	750	100
700-1-STR	1	1.163	14 ga.	750	100
700-1-1/4-STR	1 1/4	1.510	14 ga.	750	50
700-1-1/2-STR	1 1/2	1.740	12 ga.	800	50
700-2-STR	2	2.197	12 ga.	800	50

702 – Straps for Rigid Conduit, IMC and Pipe

Cat. No.	EMT, Rigid Conduit or Pipe Size	O.D. Size (In.)	Steel Strap Thickness	Design Load (lbs.)	Std. Ctn.
702-3/8	2 3/8	0.675	14 ga.	750	100
702-1/2	2-1/4	0.840	14 ga.	750	100
702-3/4	2 1/2	1.050	14 ga.	750	100
702-1	3	1.315	14 ga.	750	100
702-1-1/4	3 3/8	1.660	14 ga.	800	50
702-1-1/2	3 1/4	1.900	12 ga.	800	50
702-2-STR	3 1/2	2.375	12 ga.	800	50
702-2-1/2	4	2.875	12 ga.	1000	50

703 Universal Straps

Cat. No.	EMT, Rigid Conduit or Pipe Size	Material	Design Load (lbs.)	Std. Ctn.
703-1/2	1/2	16 ga.	400	100
703-3/4	3/4	14 ga.	550	100
703-1	1	14 ga.	550	100
703-1-1/4	1 1/4	14 ga.	800	50
703-1-1/2	1 1/2	14 ga.	800	50
703-2	2	14 ga.	800	50

© 2003 Thomas & Betts Corporation. Specifications are subject to change without notice.

Fig. 1

R-Series Continuous Thread Rod-Galvanized

Cat. No.	Fig. No.	Rod Size	Length	Ultimate Load in lbs.	Description	Qty. Per Box
R628	1	¼-20	6 feet	900	Threaded Rods	300
R638	1	⅜-16	6 feet	1900	Threaded Rods	150
R648	1	½-13	6 feet	3500	Threaded Rods	60
R1028	1	¼-20	10 feet	900	Threaded Rods	500
R1038	1	⅜-16	10 feet	1900	Threaded Rods	250
R1048	1	½-13	10 feet	3500	Threaded Rods	100



Fig. 2

R-Series Continuous Thread Rod-Galvanized

Cat. No.	Fig. No.	Rod Size	Dimension in Inches A	Dimension in Inches B	Description	Qty. Per Box
H-195-1/4	2	¼	57/64	⅜	Rod Couplers	2
H-195-3/8	2	⅜	1	½	Rod Couplers	4
H-195-1/2	2	½	1	⅝	Rod Couplers	5
H-195-5/8	2	⅝	1½	¾	Rod Couplers	10



Fig. 1



Fig. 2



Fig. 3

Hardware Components

Cat. No.	Fig. No.	Description	Pkg. Per Box
E142-1/4x075EG	1	¼"-20 x ¾" hex head bolt	50
E142-1/4x100EG	1	¼"-20 x 1" hex head bolt	50
E142-1/4x150EG	1	¼"-20 x 1½" hex head bolt	50
E145-1/4EG	2	¼"-20 x ¼" hex nut	100
SSF-MH1/4-3/8	3	¼"-20 x ⅜" bolt combo head	100

© 2003 Thomas & Betts Corporation. Specifications are subject to change without notice. www.tnb.com

Steel City®

Spring Steel Fasteners

Reference Information

Pages F58-F63

Thomas&Betts

Steel City®

Cross Reference – B-Line

B-LINE	STEEL CITY	PAGE #
B1508S	C118-070PG	N/A
B1512S	C118-110PG	N/A
B1516S	C118-140PG	N/A
B1520S	C118-175PG	N/A
B1524S	C118-175PG	N/A
B1532S	C118-200PG	N/A
B1534S	C118-250PG	N/A
B1540S	C118-300PG	N/A
B1548S	C118-370PG	N/A
B1556S	C118-410PG	N/A
B1564S	C118-460PG	N/A
B3223-3/8	SSF-HA3/8-OBT	F10
B444-1/4	510	F52
B444-3/8	502	F52
BA1	SSF-TS5/8	F37
BA12	SSF-TH24	F36
BA12-12	SSF-TH12	F36
BA12-20	SSF-TH20	F36
BA12-30	SSF-TH30	F36
BA1-24	SSF-TS1 1/2	F37
BA-12-OB-24	SSF-TH24	F36
BA-12-OB-34	SSF-TH24	F36
BA-12-SB-24	SSF-TH24	F36
BA13	SSF-TH24A	F36
BA1-32	SSF-TS2	F37
BA13-4 1/4	SSF-TH24A	F36
BA14	SSF-TCHT	F37
BA15	SSF-TFC	F36
BA1-T	SSF-TS5/8	F37
BA1-TBN	SSF-TS5/8	F37
BA20	SSF-TL24	F36
BA-2-16	SSF-T15T8-5/8	F39
BA-2-16-BN	SSF-T15T8-7/16	F39
BA-2-16-W	SSF-T15T8-5/8WH	F39
BA-2-16-WBN	SSF-T15T8-7/16WH	F39
BA28	SSF-TA7	F38
BA-2-9	SSF-T9T8-5/8	F39
BA-2-9-7	SSF-T9T8-7/16	F39
BA-2-9-7-BN	SSF-T9T8-5/8	F39
BA-2-9-W	SSF-T9T8-5/8WH	F39
BA-2-9-WBN	SSF-T9T8-5/8WH	F39
BA-4-16	SSF-T15T5/8	F39
BA-4-16-24	SSF-T15T1 1/2WH	F39
BA-4-16-32	SSF-T15T2	F39
BA-4-16-48	SSF-T15T3	F39
BA-4-16H	SSF-T15TSH	F39
BA-4-16-H1	SSF-T15TSH	F39
BA-4-16-LN	SSF-T15T5/8	F39
BA-4-16-LS	SSF-T15T5/8	F39
BA-4-16-W	SSF-T15T5/8WH	F39
BA-4-9	SSF-T9T5/8	F39
BA49-LN	SSF-T9T5/8	F39
BA-4-9-LS	SSF-T9T5/8	F39
BA-4-9-W	SSF-T9T5/8WH	F39
BA-4-WN	SSF-TWN1/4	F39
BA5-4T	SSF-TCVT	F37
BA6-4T	SSF-TCHT	F37
BAX-4-16	SSF-T15T5/8	F39
BAX-4-16-24	SSF-T15T1 1/2WH	F39
BAX-4-16-32	SSF-T15T2	F39
BAX-4-16-48	SSF-T15T3	F39
BA-8-12-A5	SSF-TCV-C1/2 3/4	F37
BA-8-12-A6	SSF-TCH-C1/2 3/4	F37
BB1	SSF-SK	F27
BB10	SSF-SLV	F32
BB10L	SSF-SLV	F32
BB-18	7502	F31
BB2-16	SSF-SG1-16	F29
BB2-16D	SSF-SG2-16	F29
BB2-16T	SSF-SG1-16	F29
BB2-24	SSF-SG1-24	F29
BB2-24D	SSF-SG2-24	F29
BB2-24T	SSF-SG1-24	F29
BB25	SSF-SH2346	F29
BB25-10	SSF-SH2346	F29
BB27	SSF-THC	F36
BB3	SSF-SHSB	F31
BB32	SSF-SR	F33
BB33	820D	F33
BB33L	820D	F33
BB4-23	SSF-SH2346	F29
BB4-4	SSF-SH2346	F29
BB4-6	SSF-SH2346	F29
BB4-XT6	SSF-S6X	F30
BB5-0	SSF-SF0	F28
BB5-10	SSF-SF5/8	F28
BB5-12	SSF-SF3/4	F28
BB5-4	SSF-SF1/4	F28
BB5-6	SSF-SF3/8	F28
BB5-8	SSF-SF1/2	F28
BB6	SSF-SFT	F28
BB60	SSF-SX	F27
BB6-A	SSF-SFA	F28
BB7	SS1-TB	F27
BB8-16	SSF-SB16	F30
BB8-24	SSF-SB24	F30
BB9	SSF-SMX	F27
BC1	SSF-BBC	F4
BC442	BC1-TB	F52
BC442-6	BC2-TB	F52
BCH21	SSF-VJ1 5/16	F42
BCH21-A28	SSF-VJ1 5/16-A7	F43
BCH21-AB	SSF-VJ1 5/16-AB	F43
BCH21-C2	SSF-VJ1 5/16-BC-AB	F42
BCH21-C442	SSF-VJ1 5/16-BC-AB	F42
BCH21E-2-4	SSF-VJ1 5/16-F1/4	F42
BCH21-E-5-8	SSF-VJ1 5/16-F1/2	F42
BCH21-E-9-12	SSF-VJ1 5/16-F3/4	F42
BCH21-F3	SSF-VJ1 5/16-V1/4	F43
BCH21-F4	SSF-VJ1 5/16-A1/4	F43
BCH21H	SSF-VJ1 5/16	F42
BCH21-RB	SSF-VJ1 5/16-AB	F43
BCH21SS4	SSF-VJ1 5/16	F42
BCH21-U-2-4	SSF-VJ1 5/16-H1/4-AB	F43
BCH21U-5-8	SSF-VJ1 5/16-H1/2-AB	F43
BCH21-U-9-12	SSF-VJ1 5/16-H13/4-AB	F43
BCH21-W2	SSF-VJ1 5/16-UC	F43
BCH21-W6	SSF-VJ1 5/16-UC	F43
BCH32	SSF-VJ2	F42
BCH32-A28	SSF-VJ2-A7	F43
BCH32-AB	SSF-VJ2-AB	F43
BCH32-C2	SSF-VJ2-BC-AB	F42
BCH32-C442	SSF-VJ2-BC-AB	F42
BCH32E-2-4	SSF-VJ2-F1/4	F42
BCH32-E-5-8	SSF-VJ2-F1/2	F42
BCH32-E-9-12	SSF-VJ2-F3/4	F42
BCH32-F3	SSF-VJ2-V1/4	F43
BCH32-F4	SSF-VJ2-A1/4	F43
BCH32H	SSF-VJ2	F42
BCH32H-SM	SSF-VJ2-A7	F43
BCH32-RB	SSF-VJ1 5/16-AB	F43
BCH32-W2	SSF-VJ2-UC	F43
BCH32-W6	SSF-VJ2-UC	F43
BD2	SSF-HFB	F12
BD4	SSF-HOB	F12
BD40	SSF-MPS	F49
BE-1-2	SSF-BF1/8	F5
BE-2-4	SSF-BF1/4	F5
BE-5-8	SSF-BF1/2	F5
BE-9-12	SSF-BF3/4	F5
BF1	SSF-BV1/16	F8
BF12	SSF-BZ1	F6
BF13	SSF-BZ2	F6
BF1-40	SS1-TB	F27
BF1-56	SS1-TB	F27
BF1-64	SS1-TB	F27
BF2	SSF-BV1/4	F8
BF3	SSF-BV1/4	F8
BF4	SSF-BA1/4	F6
BFA-1215	SSF-CAXL1	F18
BFA-1520	SSF-CAXL2	F18
BG-16	SSF-CC1	F14
BG-16-4T	SSF-CC1T	F14
BG-16-B1	SSF-SK-C1	F27
BG-16-B1	SSF-SK-S1	F27
BG-16-B5	SSF-SF-S1	F28
BG-16-C1	SSF-BBC-C1H	F4
BG-16-C2	SSF-BBC-C1V	F4
BG-16-E-2-4	SSF-CC1-F1/4	F15
BG-16-E-2-4-AS	SSF-CC1-F1/4	F15
BG-16-E-5-8	SSF-CC1-F1/2	F15
BG-16-E-5-8-AS	SSF-CC1-F1/2	F15
BG-16-E-9-12	SSF-CC1-F3/4	F15
BG-16-E-9-12-AS	SSF-CC1-F3/4	F15
BG-16-F1	SSF-BV1/16-C1	N/A
BG-16-F13	SSF-BZ2-C1	F7
BG-16-F2	SSF-BV1/4-C1	N/A
BG-16-G-16	SSF-CC1-C1	F20
BG-16-G-20	SSF-CC1-C1 1/4	F20
BG-16-G-24	SSF-CC1-C1 1/2	F20
BG-16-G-32	SSF-CC1-C2	F20
BG-16-G-6	SSF-CC1-C3/8	F20
BG-16-G-8-12	SSF-CC1-C1/2 3/4	F20
BG-16-S18	SSF-CX18-C1	F22
BG-16-S18-U-2-4	SSF-CX18-C1-H1/4	F22
BG-16-S18-U-5-8	SSF-CX18-C1-H1/2	F22
BG-16-S18-W2	SSF-CX18-C1UC	F22
BG-16-U-2-4	SSF-CC1-H1/4	F15
BG-16-U-2-4-AS	SSF-CC1-H1/4	F15
BG-16-U-5-8	SSF-CC1-H1/2	F15
BG-16-U-5-8-AS	SSF-CC1-H1/2	F15
BG-16-U-9-12	SSF-CC1-H3/4	F15
BG-16-U-9-12-AS	SSF-CC1-H3/4	F15
BG-16-W2	SSF-CUC-C1	F16
BG-16-W6	SSF-CUC-C1	F16
BG-20	SSF-CC1 1/4	F14
BG-20-4T	SSF-CC1 1/4T	F14
BG-20-C1	SSF-BBC-C1 1/4H	F4
BG-20-C2	SSF-BBC-C1 1/4V	F4
BG-20-E-2-4	SSF-CC1 1/4-F1/4	F15
BG-20-E-5-8	SSF-CC1 1/4-F1/2	F15
BG-20-E-9-12	SSF-CC1 1/4-F3/4	F15
BG-20-F13	SSF-BZ2-C1 1/4	F7
BG-20-U-2-4	SSF-CC1 1/4-H1/4	F15
BG-20-U-5-8	SSF-CC1 1/4-H1/2	F15
BG-20-U-9-12	SSF-CC1 1/4-H3/4	F15
BG-24	SSF-CC1 1/2	F14
BG-24-4T	SSF-CC1 1/2T	F14
BG-24-C1	SSF-BBC-C1 1/2H	F4
BG-24-C2	SSF-BBC-C1 1/2V	F4
BG-24-E-2-4	SSF-CC1 1/2-F1/4	F15
BG-24-E-5-8	SSF-CC1 1/2-F1/2	F15
BG-24-E-9-12	SSF-CC1 1/2-F3/4	F15
BG-24-U-2-4	SSF-CC1 1/2-H1/4	F15
BG-24-U-5-8	SSF-CC1 1/2-H1/2	F15
BG-24-U-9-12	SSF-CC1 1/2-H3/4	F15
BG-32	SSF-CC2	F14
BG-32-4T	SSF-CC2T	F14
BG-32-C1	SSF-BBC-C2H	F4
BG-32-C2	SSF-BBC-C2V	F4
BG-32-E-2-4	SSF-CC2-F1/4	F15
BG-32-E-5-8	SSF-CC2-F1/2	F15
BG-32-E-9-12	SSF-CC2-F3/4	F15
BG-32-U-2-4	SSF-CC2-H1/4	F15
BG-32-U-5-8	SSF-CC2-H1/2	F15
BG-32-U-9-12	SSF-CC2-H3/4	F15
BG-6	SSF-CC3/8	F14
BG-6	SSF-CC3/8T	F14
BG-6-4T	SSF-CC1/2 3/4T	F14
BG-6-A5	SSF-TCV-3/8	N/A
BG-6-A6	SSF-TCH-C3/8	N/A
BG-6-B5	SSF-SF-C3/8	F28
BG-6-E-2-4	SSF-CC3/8-F1/4	F15
BG-6-E-5-8	SSF-CC3/8-F1/2	F15
BG-6-E-9-12	SSF-CC3/8-F3/4	F15
BG-6-F1	SSF-BV1/16-C3/8	N/A
BG-6-F13	SSF-BZ2-C3/8	F7
BG-6-F2	SSF-BV1/4-C3/8	N/A
BG-6-H7	SSF-SAB-S3/4	F32
BG-6-S18	SSF-CX18-C1UC	F22
BG-6-S18	SSF-CX18-C3/8UC	F22
BG-6-S18	SSF-CX18-C1/2 3/4UC	F22
BG-6-S18-U-2-4	SSF-CX18-C3/8H1/4	F22
BG-6-S18-U-5-8	SSF-CX18-C3/8H1/2	F22
BG-6-S18-W2	SSF-CX18-C3/8UC	F22
BG6-U-2-4	SSF-CC3/8-H1/4	F15
BG-6-U-5-8	SSF-CC3/8-H1/2	F15
BG-6-U-9-12	SSF-CC3/8-H3/4	F15
BG-8-12	SSF-CC1/2 3/4	F14
BG-812-4T	SSF-CC1/2 3/4T	F14
BG-8-12-A5	SSF-TCV-C1/2 3/4	F37
BG-8-12-A6	SSF-TCH-C1/2 3/4	F37
BG-8-12-B1	SSF-SK-C1/2 3/4	F27
BG-8-12-B5	SSF-SF-C1/2 3/4	F28
BG-8-12-C1	SSF-BBC-C1/2 3/4H	F4
BG-8-12-C2	SSF-BBC-C1/2 3/4V	F4
BG-8-12-E-2-4	SSF-CC1/2 3/4-F1/4	F15
BG-8-12-E-5-8	SSF-CC1/2 3/4-F1/2	F15
BG-8-12-E-5-8-AS	SSF-CC1/2 3/4-F1/2	F15
BG-8-12-E-9-12	SSF-CC1/2 3/4-F3/4	F15
BG-8-12-E-9-12-AS	SSF-CC1/2 3/4-F3/4	F15
BG-8-12-F1	SSF-BV1/16-C1/2 3/4	N/A
BG-8-12-F13	SSF-BZ2-C1/2 3/4	F7
BG-8-12-F2	SSF-BV1/4-C1/2 3/4	N/A
BG-8-12-H7	SSF-SAB-C3/8	F32
BG-8-12-S18	SSF-CX18-C1/2 3/4	F22
BG-8-12-S18-U-2-4	SSF-CX18-C1/2 3/4-H1/4	F22
BG-8-12-S18-U-5-8	SSF-CX18-C1/2 3/4-H1/2	F22
BG-8-12-S18-W2	SSF-CX18-C1/2 3/4UC	F22
BG-8-12-U-2-4	SSF-CC1/2 3/4-H1/4	F15
BG-8-12-U-5-8	SSF-CC1/2 3/4-H1/2	F15
BG-8-12-U-5-8-AS	SSF-CC1/2 3/4-H1/2	F15
BG-8-12-U-9-12	SSF-CC1/2 3/4-H3/4	F15
BG-8-12-U-9-12-AS	SSF-CC1/2 3/4-H3/4	F15
BG-8-12-W2	SSF-CUC-C1/2 3/4	F16
BG-8-12-W6	SSF-CUC-C1/2 3/4	F16
BH1	SSF-HB1/4	F12
BH1	SSF-HB8	F12
BH10	SH10	N/A
BH-1-2-R	SSF-HR-F1/4	F12
BH15	CI-8932	F40
BH16	CI-8932	F40
BH1-E-2-4	SSF-HB1/4-F1/4	F11
BH1-E-2-4	SSF-HB8-F1/4	F11
BH1-E-5-8	SSF-HB1/4-F1/2	F11
BH1-E-5-8	SSF-HB8-F1/2	F11

Thomas&Betts

© 2002 Thomas & Betts Corporation. Specifications are subject to change without notice. www.tnb.com

Steel City®

Cross Reference – B-Line

B-LINE	STEEL CITY	PAGE #
BH1-E-9-12	SSF-HB1/4-F3/4	F11
BH1-E-9-12	SSF-HB8-F3/4	F11
BH1-F1	SSF-BA1/4-B1/4	F6
BH1-F1	SSF-BA1/4-B8	F6
BH1-F1	SSF-BV1/16-B1/4	F8
BH1-F1	SSF-BV1/16-B8	F8
BH1-F12	SSF-BZ1-B1/4	F7
BH1-F12	SSF-BZ1-B8	F7
BH1-F2	SSF-BV1/4-B8	F8
BH1-F3	SSF-BV1/4-B8	F8
BH1-F4	SSF-BA1/4-B8	F6
BH1-H7	SSF-HB1/4-AB	F10
BH1-H7	SSF-HB8-AB	F10
BH1-H8	SSF-HB1/4-OB	F10
BH1-H8	SSF-HB8-OB	F10
BH2	SSF-HB3/8	F12
BH-2-4	SSF-HS-F1/4	F12
BH-2-4-R	SSF-HR-F1/4	F12
BH2-E-2-4	SSF-HB3/8-F1/4	F11
BH2-E-5-8	SSF-HB3/8-F1/2	F11
BH2-E-9-12	SSF-HB3/8-F3/4	F11
BH2-F1	SSF-BV1/16-B3/8	F8
BH2-F12	SSF-BZ1-A3/8T	F7
BH2-F2	SSF-BV1/4-B3/8	F8
BH2-F3	SSF-BV1/16-B3/8	F8
BH2-F4	SSF-BA1/4-B8	F6
BH2-H7	SSF-HB3/8-AB	F10
BH2-H8	SSF-HB3/8-OB	F10
BH4	SSF-HA1/4T	F12
BH4-E-2-4	SSF-HA1/4-F1/4T	F11
BH4-E-2-4-AS	SSF-HA1/4-F1/4T	F11
BH4-E-5-8	SSF-HA1/4-F1/2T	F11
BH4-E-5-8-AS	SSF-HA1/4-F1/2T	F11
BH4-E-9-12	SSF-HA1/4-F3/4T	F11
BH4-E-9-12-AS	SSF-HA1/4-F3/4T	F11
BH4-F1	SSF-BV1/16-A1/4T	N/A
BH4-F12	SSF-BZ1-A1/4T	F7
BH4-F2	SSF-BV1/4-A1/4T	N/A
BH4-F3	SSF-BV1/16-A1/4T	N/A
BH4-F4	SSF-BA1/4-A1/4T	F6
BH4-H7	SSF-HA1/4-ABT	F10
BH4-H8	SSF-HA1/4-OBT	F10
BH5	SSF-HA3/8	F12
BH-5-8	SSF-HS-F1/2	F12
BH-5-8-R	SSF-HR-F1/2	F12
BH5-E-2-4	SSF-HA3/8-F1/4	F11
BH5-E-5-8	SSF-HA3/8-F1/2	F11
BH5-E-9-12	SSF-HA3/8-F3/4	F11
BH5-F1	SSF-BV1/16-A3/8	N/A
BH5-F12	SSF-BZ1-A3/8	F7
BH5-F2	SSF-BV1/4-A3/8	N/A
BH5-F3	SSF-BV-1/16-A3/8	N/A
BH5-F4	SSF-BZ1-A3/8	F7
BH5-H7	SSF-HA3/8-AB	F10
BH5-H8	SSF-HA3/8-OB	F10
BH6	SSF-HA3/8T	F12
BH6-E-2-4	SSF-HA3/8-F1/4T	F11
BH6-E-2-4-AS	SSF-HA3/8-F1/4T	F11
BH6-E-5-8	SSF-HA3/8-F1/2T	F11
BH6-E-5-8-AS	SSF-HA3/8-F1/2T	F11
BH6-E-9-12	SSF-HA3/8-F3/4T	F11
BH6-E-9-12-AS	SSF-HA3/8-F3/4T	F11
BH6-F1	SSF-BV1/16-A3/8T	N/A
BH6-F12	SSF-BZ1-B3/8	F7
BH6-F12	SSF-BZ1-A1/4T	F7
BH6-F12-AS	SSF-BZ1-A1/4T	F7
BH6-F2	SSF-BV1/16-A3/8T	N/A
BH6-F3	SSF-BV1/16-A3/8T	N/A
BH6-F4	SSF-BA1/4-A3/8T	F6
BH6-H7	SSF-HA3/8-ABT	F10
BH6-H8	SSF-HA3/8-OBT	F10
BH7	SSF-HSAB	F12
BH7-6	SSF-HSAB	F12
BH8	SSF-HOB	F12
BH8-6	SSF-HOB	F12
BH9	JC100	N/A
BH9-10	JC100	N/A
BH-9-12	SSF-HS-F3/4	F12
BH-9-12-R	SSF-HR-F3/4	F12
BHE-1-2	SSF-HS-F1/4	F12
BL1400	CH-0 LN	N/A
BL1410	CH-1 LN	N/A
BL1420	CH-2 LN	N/A
BL1425	CH-2 1/2 LN	N/A
BL1430	CH-3 LN	N/A
BL1440	CH-4 LN	N/A
BL1450	CH-5 LN	N/A
BL1460	6H6-B	F52
BL1470	6H7-B	F52
BL1480	6H8-B	F52
BL1490	6H9-B	F52
BM1	1300	F31
BM1M	1300	F31
BM2	1216-EN	F31
BM3	CP-1	N/A
BM5	3900	F50
BP-12	SSF-CS3/4	F14
BP-12-4T	SSF-CS3/4T	F14
BP-12-A28	SSF-TA7-S3/4	F38
BP-12-A5	SSF-TCV-S3/4	F37
BP-12-A6	SSF-TCH-S3/4	F37
BP-12-B1	SSF-SK-S3/4	F27
BP-12-B5	SSF-SF-S3/4	F28
BP-12-C1	SSF-BBC-S3/4H	F4
BP-12-C2	SSF-BBC-S3/4V	F4
BP-12-D3	SSF-CS3/4-FB	F23
BP-12-D4	SSF-CS3/4-OB	F23
BP-12-E-2-4	SSF-CS3/4-F1/4	F15
BP-12-E-5-8	SSF-CS3/4-F1/2	F15
BP-12-E-9-12	SSF-CS3/4-F3/4	F15
BP-12-F13	SSF-BZ2-S3/4	F7
BP-12-H7	SSF-SAB-S3/4	F32
BP-12-P-12	SSF-CS3/4-S3/4	F20
BP-12-P-16	SSF-CS3/4-S1	F20
BP-12-U-2-4	SSF-CS3/4-H1/4	F15
BP-12-U-5-8	SSF-CS3/4-H1/2	F15
BP-12-U-9-12	SSF-CS3/4-H3/4	F15
BP-12-W2	SSF-CUC-S3/4	F16
BP-12-W6	SSF-CUC-S3/4	F16
BP-16	SSF-CS1SF-CS1	N/A
BP-16-4T	SSF-CS1T	F14
BP-16-A28	SSF-TA7-S1	F38
BP-16-A5	SSF-TCV-S1	F37
BP-16-A5	SSF-TCV-S3/4	F37
BP-16-A6	SSF-TCH-S1	F37
BP-16-A6	SSF-TCH-S3/4	F37
BP-16-B1	SSF-SK-S1	F27
BP-16-B5	SSF-SF-S1	F28
BP-16-C1	SSF-BBC-S1H	F4
BP-16-C2	SSF-BBC-S1V	F4
BP-16-D4	SSF-CS1-OB	F23
BP-16-E-2-4	SSF-CS1-F1/4	F15
BP-16-E-5-8	SSF-CS1-F1/2	N/A
BP-16-E-9-12	SSF-CS1-F3/4	F15
BP-16-F13	SSF-BZ2-S1	F7
BP-16-P-16	SSF-CS1-S1	F20
BP-16-U-2-4	SSF-CS1-H1/4	F15
BP-16-U-5-8	SSF-CS1-H1/2	F15
BP-16-U-9-12	SSF-CS1-H3/4	F15
BP-16-U-9-12	SSF-CS1-F3/4	F15
BP-16-W2	SSF-CUC-S1	F16
BP-16-W6	SSF-CUC-S1	F16
BP-8	SSF-CS1/2	F14
BP-8-12-H7	SSF-SAB-C1/2 3/4	F32
BP-8-4T	SSF-CS1/2T	F14
BP-8-A28	SSF-TA7-S1/2	F38
BP-8-A5	SSF-TCV-S1/2	F37
BP-8-A6	SSF-TCH-S1/2	F37
BP-8-B1	SSF-SK-S1/2	F27
BP-8-B5	SSF-SF-S1/2	F28
BP-8-C1	SSF-BBC-S1/2H	F4
BP-8-C2	SSF-BBC-S1/2V	F4
BP-8-D3	SSF-CS1/2-FB	F23
BP-8-D4	SSF-CS1/2-OB	F23
BP-8-E-2-4	SSF-CS1/2-F1/4	F15
BP-8-E-5-8	SSF-CS1/2-F1/2	F15
BP-8-E-9-12	SSF-CS1/2-F3/4	F15
BP-8-F13	SSF-BZ2-S1/2	F7
BP-8-H7	SSF-SAB-S1/2	F32
BP-8-P-12	SSF-CS1/2-S3/4	F20
BP-8-P-16	SSF-CS1/2-S1	F20
BP-8-P-8	SSF-CS1/2-S1/2	F20
BP-8-U-2-4	SSF-CS1/2-H1/4	F15
BP-8-U-5-8	SSF-CS1/2-H1/2	F15
BP-8-U-9-12	SSF-CS1/2-H3/4	F15
BP-8-W2	SSF-CUC-S1/2	F16
BP-8-W6	SSF-CUC-S1/2	F16
BPC-12	703-3/4	F55
BPC-16	703-1	F55
BPC-20	703-1-1/4	F55
BPC-24	703-1-1/2	F55
BPC-32	703-2	F55
BPC-40	702-2-1/2	F55
BPC-48	702-3	N/A
BPC-56	702-3 1/2	N/A
BPC-64	702-4	N/A
BPC-8	703-1/2	F55
BU-2-4	SSF-BH1/4	F5
BU-2-4-S	SSF-BH1/4S	F5
BU-2-4-S-AS	SSF-BH1/4S	F5
BU-5-8	SSF-BH1/2	F5
BU-5-8-S	SSF-BH1/2S	F5
BU-5-8-S-AS	SSF-BH1/2S	F5
BU-9-12	SSF-BH3/4	F5
BU-9-12-S	SSF-BH3/4S	F5
BU-9-12-S-AS	SSF-BH3/4S	F5
BW-12	SSF-CK3/4	F17
BW-16	SSF-CK1	F17
BW2	SSF-CUC	F16
BW-20	SSF-CK1	F17
BW4	SSF-CK535	F17
BW-8	SSF-CK1/2	F17
BX4	SSF-CC3/8	F14
BX4-E-2-4	SSF-CC3/8-F1/4	F15
BX4-E-5-8	SSF-CC3/8-F1/2	F15
BX4-E-9-12	SSF-CC3/8-F3/4	F15
BX4-F13	SSF-BZ2-C3/8	F7
BX4-H7	SSF-SAB-C3/8	F32
BX4-U-2-4	SSF-CC3/8-H1/4	F15
BX4-U-5-8	SSF-CC3/8-H1/2	F15
BX4-U-9-12	SSF-CC3/8-H3/4	F15
BX5	SSF-SF-C3/8	F28
BX-8	SSF-CB706	F16
BX-8-B	SSF-CB706	F16
BX9	SSF-CM535	F19
BXL-1011	SSF-CEL437	F18
BXL-1214	SSF-CEL562	F18
BXL-1519	SSF-CEL718	F18
BXL-2024	SSF-CEL937	F18
BXL-2530	SSF-CEL1250	F18
BXL-67	SSF-CEL218	F18
BXL-67	SSF-CEL281	F18
BXL-89	SSF-CEL375	F18
BXM-1011	SSF-CEM437	F18
BXM-1214	SSF-CEM562	F18
BXM-1519	SSF-CEM718	F18
BXM-2024	SSF-CEM937	F18
BXM-2530	SSF-CEM1250	F18
BXM-67	SSF-CEM218	F18
BXM-67	SSF-CEM281	F18
BXM-89	SSF-CEM375	F18
BXS-1011	SSF-CES437	F18
BXS-1214	SSF-CES562	F18
BXS-1519	SSF-CES718	F18
BXS-2024	SSF-CES937	F18
BXS-2530	SSF-CES1250	F18
BXS-67	SSF-CES218	F18
BXS-67	SSF-CES281	F18
BXS-89	SSF-CES375	F18
FN224	UC 100 1/4	N/A
FN228	UC 100 3/8	N/A
MSQN1/4	E145-1/4EG	F56
PR 1/4 X 36	H104 1/4X6	N/A
PR 1/4 X 72	H104 1/4X6	N/A
PR 3/8 X 36	H104 3/8X6	N/A
PR 3/8 X 72	H104 3/8X6	N/A
SHHMS 1/4 x 1-2	E142-1/4x075EG	F56
SRHMS 1/4 x 3/8	E142-1/4x075EG	F56

* B-Line is a registered trademark of B-Line Systems, Inc.

Thomas&Betts

© 2002 Thomas & Betts Corporation. Specifications are subject to change without notice.

Steel City®

Cross Reference – Caddy

CADDY	STEEL CITY	PAGE #
1000050EG	C727-1/2	N/A
1000075EG	C727-3/4	N/A
1000100EG	C727-1	N/A
1000125EG	C727-1 1/4	N/A
1000150EG	C727-1 1/2	N/A
1000200EG	C727-2	N/A
1150250EG	C727-2 1/2	N/A
1150300EG	C727-3	N/A
1150350EG	C727-3 1/2	N/A
1150400EG	C727-4	N/A
122	SSF-BZ1	F6
1224TI	SSF-BZ1-A1/4T	F7
1226A	SSF-BZ1-B3/8	F7
1226T	SSF-BZ1-A3/8	F7
1226TI	SSF-BZ1-A3/8T	F7
122708	SSF-BZ1-B1/4	F7
122708	SSF-BZ1-B8	F7
123	SSF-BZ2	F6
12312P	SSF-BZ2-S3/4	F7
12316M	SSF-BZ2-C1	F7
12316P	SSF-BZ2-S1	F7
12320M	SSF-BZ2-C1 1/4	F7
1236M	SSF-BZ2-C3/8	F7
123812M	SSF-BZ2-C1/2 3/4	F7
1238P	SSF-BZ2-S1/2	F7
12P	SSF-CS3/4	F14
12P12P	SSF-CS3/4-S3/4	F20
12P16P	SSF-CS3/4-S1	F20
12P24	SSF-CS3/4-H1/4	F15
12P24SM	SSF-CS3/4-F1/4	F15
12P4I	SSF-CS3/4T	F14
12P58	SSF-CS3/4-H1/2	F15
12P58SM	SSF-CS3/4-F1/2	F15
12P912	SSF-CS3/4-H3/4	F15
12P912SM	SSF-CS3/4-F3/4	F15
12PATA	SSF-TCH-S3/4	F37
12PATS	SSF-TCV-S3/4	F37
12PF	SSF-SF-S3/4	F28
1616M	SSF-CC1-C1	F20
1620M	SSF-CC1-C1 1/4	F20
1624M	SSF-CC1-C1 1/2	F20
1632M	SSF-CC1-C2	F20
166M	SSF-CC1-C3/8	F20
16812M	SSF-CC1-C1/2 3/4	F20
16M	SSF-CC1	F14
16M24	SSF-CC1-H1/4	F15
16M24SM	SSF-CC1-F1/4	F15
16M4I	SSF-CC1T	F14
16M58	SSF-CC1-H1/2	F15
16M58SM	SSF-CC1-F1/2	F15
16M912	SSF-CC1-H3/4	F15
16M912SM	SSF-CC1-F3/4	F15
16MATA	SSF-TCH-C1	N/A
16MATS	SSF-TCV-C1	N/A
16MB18	SSF-CX18-C1UC	F22
16MB1824	SSF-CX18-C1-H1/4	F22
16MB1858	SSF-CX18-C1-H1/2	F22
16MB186	SSF-CX18-C1UC	F22
16MB18A	SSF-CX18-C1	F22
16MF	SSF-SF-C1	F28
16P	SSF-CS1	F14
16P16P	SSF-CS1-S1	F20
16P24	SSF-CS1-H1/4	F15
16P24SM	SSF-CS1-F1/4	F15
16P4I	SSF-CS1T	F14
16P58	SSF-CS1-H1/2	F15
16P58SM	SSF-CS1-F1/2	N/A
16P912	SSF-CS1-H3/4	F15
16P912SM	SSF-CS1-F3/4	F15
16PATA	SSF-TCH-S1	F37
16PATS	SSF-TCV-S1	F37
16PF	SSF-SF-S1	F28
2000037EG	C775-L 3/8	N/A
2000050EG	C775-L 1/2	N/A
20M	SSF-CC1 1/4	F14
20M24	SSF-CC1 1/4-H1/4	F15
20M24SM	SSF-CC1 1/4-F1/4	F15
20M4I	SSF-CC1 1/4T	F14
20M58	SSF-CC1 1/4-H1/2	F15
20M58SM	SSF-CC1 1/4-F1/2	F15
20M912	SSF-CC1 1/4-H3/4	F15
20M912SM	SSF-CC1 1/4-F3/4	F15
24M	SSF-CC1 1/2	F14
24M24	SSF-CC1 1/2-H1/4	F15
24M24SM	SSF-CC1 1/2-F1/4	F15
24M4I	SSF-CC1 1/2T	F14
24M58	SSF-CC1 1/2-H1/2	F15
24M58SM	SSF-CC1 1/2-F1/2	F15
24M912	SSF-CC1 1/2-H3/4	F15
24M912SM	SSF-CC1 1/2-F3/4	F15
2550037EG	M775-L 3/8	N/A
2550050EG	M775-L 1/2	N/A
2550062EG	M775-L 5/8	N/A
2BR12	30-00805	N/A
2BR20	30-00807	N/A
2BR32	30-00807	N/A
2BR8	30-00801	N/A
2BRT12	SSF-VR3/4A	F45
2BRT20	SSF-VR1 1/4A	F45
2BRT32	SSF-VR1 3/4A	F45
2BRT8	SSF-VR3/4A	F45
2G9	SSF-T9T8-7/16	F39
2G9S10	SSF-T9T8-5/8	F39
2G9S10WH	SSF-T9T8-5/8WH	F39
2G9WB	SSF-T9T8-7/16	F39
2H4	SSF-BF1/8	F5
3000037EG	M777 3/8	N/A
3000050EG	M777 1/2	N/A
3000062EG	M777 5/8	N/A
3000075EG	M777 3/4	N/A
304B2	SSF-ST66	F33
3100037EG	M778 3/8	N/A
3100050EG	M778 1/2	N/A
32M	SSF-CC2	F14
32M24	SSF-CC2-H1/4	F15
32M24SM	SSF-CC2-F1/4	F15
32M4I	SSF-CC2T	F14
32M58	SSF-CC2-H1/2	F15
32M58SM	SSF-CC2-F1/2	F15
32M912	SSF-CC2-H3/4	F15
32M912SM	SSF-CC2-F3/4	F15
350	SSF-SK	F27
35012P	SSF-SK-S3/4	F27
35016M	SSF-SK-C1	F27
35016P	SSF-SK-S1	F27
350812M	SSF-SK-C1/2 3/4	F27
3508P	SSF-SK-S1/2	F27
4180050EG	C711-1/2	N/A
4180075EG	C711-3/4	N/A
4180100EG	C711-1	N/A
4180125EG	C711-125	N/A
4180150EG	C711-1 1/2	N/A
4180200EG	C711-2	N/A
4180250EG	C711-2 1/2	N/A
4180300EG	C711-3	N/A
4180350EG	C711-3 1/2	N/A
4180400EG	C711-4	N/A
449	SSF-CM535	F19
4ACS	SSF-TCHT	F37
4BRT20	SSF-VR1 1/4B	F45
4BRT20BP	SSF-VR1 1/4B	F45
4BRT20WS	SSF-VR1 1/4D	F45
4BRT20WSBP	SSF-VR1 1/4D	F45
4BRT32	SSF-VR1 5/8B	F45
4BRT32BP	SSF-VR1 5/8B	F45
4BRT32WS	SSF-VR1 5/8D	F45
4BRT32WSBP	SSF-VR1 5/8D	F45
4BRT64	SSF-VR1 5/8D	F45
4G16	SSF-T15T5/8	F39
4G1615	SSF-T15T1 1/2	F39
4G162	SSF-T15T2	F39
4G163	SSF-T15T3	F39
4G16BP	SSF-T15T5/8	F39
4G16H	SSF-T15TSH	F39
4G16LN	SSF-T15T5/8	F39
4G16LS	SSF-T15T5/8	F39
4G8	SSF-T15T8-5/8	F39
4G8S7	SSF-T15T8-7/16	F39
4G8S7WB	SSF-T15T8-7/16	F39
4G8S7WH	SSF-T15T8-7/16WH	F39
4G8WB	SSF-T15T8-5/8	F39
4G8WH	SSF-T15T8-5/8WH	F39
4G8WHWB	SSF-T15T8-5/8WH	F39
4G9	SSF-T9T5/8	F39
4G9LN	SSF-T9T5/8	F39
4G9LS	SSF-T9T5/8	F39
4H24	SSF-BF1/4	F5
4H58	SSF-BF1/2	F5
4H912	SSF-BF3/4	F5
4TI	SSF-HA1/4T	F12
4TI24	SSF-HA1/4-F1/4T	F11
4TI58	SSF-HA1/4-F1/2T	F11
4TI912	SSF-HA1/4-F3/4T	F11
4TIB	SSF-HA1/4-ABT	F10
4TIO	SSF-HA1/4-OBT	F10
4WN	SSF-TWN1/4	F39
4Z34	SSF-CUC	F16
4Z3412P	SSF-CUC-S3/4	F16
4Z3416M	SSF-CUC-C1	F16
4Z3416P	SSF-CUC-S1	F16
4Z34812M	SSF-CUC-C1/2 3/4	F16
4Z348P	SSF-CUC-S1/2	F16
4Z34BP	SSF-CUC	F16
510HD	SSF-THC	F36
512	SSF-TH24	F36
51212	SSF-TH12	F36
51220	SSF-TH20	F36
51230	SSF-TH30	F36
512A	SSF-TH24A	F36
512HD	SSF-TH24	F36
512HDBP	SSF-TH24	F36
512HDEEP	SSF-TH24A	F36
512HDXT	SSF-TH24A	F36
515	SSF-TFC	F36
515A	SSF-TFC	F36
520	SSF-TL24	F36
528	SSF-TA7	F38
52812P	SSF-TA7-S3/4	F38
52816P	SSF-TA7-S1	F38
5288P	SSF-TA7-S1/2	F38
6A	SSF-HB3/8	F12
6A24	SSF-HB3/8-F1/4	F11
6A58	SSF-HB3/8-F1/2	F11
6A912	SSF-HB3/8-F3/4	F11
6AB	SSF-HB3/8-AB	F10
6AO	SSF-HB3/8-OB	F10
6M	SSF-CC3/8	F14
6M24	SSF-CC3/8-H1/4	F15
6M24SM	SSF-CC3/8-F1/4	F15
6M4I	SSF-CC3/8T	F14
6M58	SSF-CC3/8-H1/2	F15
6M58SM	SSF-CC3/8-F1/2	F15
6M912	SSF-CC3/8-H3/4	F15
6M912SM	SSF-CC3/8-F3/4	F15
6MATA	SSF-TCH-C3/8	N/A
6MATS	SSF-TCV-3/8	N/A
6MB18	SSF-CX18-C3/8UC	F22
6MB1824	SSF-CX18-C3/8H1/4	F22
6MB1858	SSF-CX18-C3/8H1/2	F22
6MB186	SSF-CX18-C3/8UC	F22
6MB18A	SSF-CX18-C3/8	F22
6MF	SSF-SF-C3/8	F28
6T	SSF-HA3/8	F12
6TA24	SSF-HA3/8-F1/4	F11
6TA58	SSF-HA3/8-F1/2	F11
6TA912	SSF-HA3/8-F3/4	F11
6TB	SSF-HA3/8-AB	F10
6TI	SSF-HA3/8T	F12
6TI24	SSF-HA3/8-F1/4T	F11
6TI58	SSF-HA3/8-F1/2T	F11
6TI912	SSF-HA3/8-F3/4T	F11
6TIB	SSF-HA3/8-ABT	F10
6TIO	SSF-HA3/8-OBT	F10
6TO	SSF-HA3/8-OB	F10
6Z34	SSF-CUC	F16
6Z3412P	SSF-CUC-S3/4	F16
6Z3416M	SSF-CUC-C1	F16
6Z3416P	SSF-CUC-S1	F16
6Z34812M	SSF-CUC-C1/2 3/4	F16
6Z348P	SSF-CUC-S1/2	F16
708	SSF-HB1/4	F12
708	SSF-HB8	F12
70824	SSF-HB1/4-F1/4	F11
70824	SSF-HB8-F1/4	F11
70858	SSF-HB1/4-F1/2	F11
70858	SSF-HB8-F1/2	F11
708912	SSF-HB1/4-F3/4	F11
708912	SSF-HB8-F3/4	F11
708AB	SSF-HB1/4-AB	F10
708AB	SSF-HB8-AB	F10
708AO	SSF-HB1/4-OB	F10
708AO	SSF-HB8-OB	F10
740	SSF-MPS	F49
760	SSF-SX	F27
766A	SS1-TB	F27
766ABP	SS1-TB	F27
770	JC100	N/A
771	SH10	N/A
781	SSF-SP1	F32
812M	SSF-CC1/2 3/4	F14
812M24	SSF-CC1/2 3/4-H1/4	F15
812M24BP	SSF-CC1/2 3/4-H1/4	F15
812M24SM	SSF-CC1/2 3/4-F1/4	F15
812M4I	SSF-CC1/2 3/4T	F14
812M58	SSF-CC1/2 3/4-H1/2	F15
812M58SM	SSF-CC1/2 3/4-F1/2	F15
812M912	SSF-CC1/2 3/4-H3/4	F15
812M912SM	SSF-CC1/2 3/4-F3/4	F15
812MATA	SSF-TCH-C1/2 3/4	F37
812MATS	SSF-TCV-C1/2 3/4	F37
812MB18	SSF-CX18-C1/2 3/4UC	F22
812MB1824	SSF-CX18-C1/2 3/4-H1/4	F22
812MB1858	SSF-CX18-C1/2 3/4-H1/2	F22
812MB186	SSF-CX18-C1/2 3/4UC	F22
812MB18A	SSF-CX18-C1/2 3/4	F22
812MB18S	SSF-CX18-C1/2 3/4S	F22
812MF	SSF-SF-C1/2 3/4	F28
8P	SSF-CS1/2	F14
8P12P	SSF-CS1/2-S3/4	F20
8P16P	SSF-CS1/2-S1	F20
8P24	SSF-CS1/2-H1/4	F15
8P24SM	SSF-CS1/2-F1/4	F15
8P4I	SSF-CS1/2T	F14
8P58	SSF-CS1/2-H1/2	F15
8P58SM	SSF-CS1/2-F1/2	F15
8P8P	SSF-CS1/2-S1/2	F20
8P912	SSF-CS1/2-H3/4	F15
8P912SM	SSF-CS1/2-F3/4	F15
8PATA	SSF-TCH-S1/2	F37
8PATS	SSF-TCV-S1/2	F37
8PF	SSF-SF-S1/2	F28
AB	SSF-HAB	F12
AF14	SSF-BA1/4	F6
AF144TI	SSF-BA1/4-A1/4T	F6
AF146A	SSF-BA1/4-B3/8	F6
AF146T	SSF-BA1/4-A3/8	F6
AF146TI	SSF-BA1/4-A3/8T	F6
AF14708	SSF-BA1/4-B1/4	F6
AF14708	SSF-BA1/4-B8	F6
AO	SSF-HOB	F12
AOL	SSF-HOB	F12
AOL12P	SSF-CS3/4-OB	F23
AOL16P	SSF-CS1-OB	F23
AOL812M	SSF-CS1/2-OB	F23
AOL8P	SSF-CS1/2-OB	F23
ATA4I	SSF-TCHT	F37
ATS4I	SSF-TCVT	F37
BC	SSF-BBC	F4
BC090900EG	U568-6	N/A
BC091200EG	U568-7	N/A
BC091500EG	U568-8	N/A
BC101500EG	SSF-BR1	N/A
BC12P	SSF-BBC-S3/4V	F4
BC12PSM	SSF-BBC-S3/4H	F4
BC130025EG	U560-1/4	N/A
BC130037EG	U560-3/8	N/A
BC130050EG	U560-1/2	N/A
BC130062EG	U560-5/8	N/A
BC140037EG	U564-3/8	N/A
BC140050EG	U564-1/2	N/A
BC140062EG	U564-5/8	N/A
BC16M	SSF-BBC-C1V	F4
BC16P	SSF-BBC-S1V	F4
BC16PSM	SSF-BBC-S1H	F4
BC17A000EG	U501	N/A
BC17D000EG	U502	N/A
BC180037EG	U514	N/A
BC180050EG	U514-A	N/A
BC200	BC1-TB	F52
BC200000EG	512	N/A
BC200BP	BC1-TB	F52
BC200SS	BC1-TB	F52
BC20M	SSF-BBC-C1 1/4V	F4
BC20MSM	SSF-BBC-C1 1/4H	F4
BC24M	SSF-BBC-C1 1/2V	F4
BC24MSM	SSF-BBC-C1 1/2H	F4

F

Steel City®

© 2002 Thomas & Betts Corporation. Specifications are subject to change without notice.

Steel City®

Cross Reference – Caddy

CADDY	STEEL CITY	PAGE #
BC32M	SSF-BBC-C2V	F4
BC32MSM	SSF-BBC-C2H	F4
BC400	BC2-TB	F52
BC812M	SSF-BBC-C1/2 3/4V	F4
BC812MSM	SSF-BBC-C1/2 3/4H	F4
BC8P	SSF-BBC-S1/2V	F4
BC8PSM	SSF-BBC-S1/2H	F4
BCBP	SSF-BBC	F4
BHC	SSF-THC	F36
C2416SM	SSF-CC1-F1/4	F15
C24812SM	SSF-CC1/2 3/4-F1/4	F15
C4T124	SSF-HA1/4-F1/4T	F11
C4T158	SSF-HA1/4-F1/2T	F11
C4T1912	SSF-HA1/4-F3/4T	F11
C5816SM	SSF-CC1-F1/2	F15
C58812SM	SSF-CC1/2 3/4-F1/2	F15
C6T124	SSF-HA3/8-F1/4	F11
C6T158	SSF-HA3/8-F1/2	F11
C6T1912	SSF-HA3/8-F3/4	F11
C91216SM	SSF-CC1-F3/4	F15
C912812SM	SSF-CC1/2 3/4-F3/4	F15
CAT12	SSF-VJ1 5/16	F42
CAT1224	SSF-VJ1 5/16-H1/4-AB	F43
CAT1224SM	SSF-VJ1 5/16-F1/4	F42
CAT124Z34	SSF-VJ1 5/16-UC	F43
CAT1258	SSF-VJ1 5/16-A7	F43
CAT1258SM	SSF-VJ1 5/16-H1/2-AB	F43
CAT126Z34	SSF-VJ1 5/16-F1/2	F42
CAT12912	SSF-VJ1 5/16-UC	F43
CAT12912SM	SSF-VJ1 5/16-H13/4-AB	F43
CAT12AB	SSF-VJ1 5/16-F3/4	F42
CAT12AF14	SSF-VJ1 5/16-AB	F43
CAT12BC	SSF-VJ1 5/16-A1/4	F43
CAT12BC200	SSF-VJ1 5/16-BC	F42
CAT12CD1B	SSF-VJ1 5/16-CH1LN	N/A
CAT12TS	SSF-VJ1 5/16-BC-AB	F42
CAT12VF14	SSF-VJ1 5/16-V1/4	F43
CAT21	SSF-VJ1 5/16C	F42
CAT2124	SSF-VJ1 5/16-H1/4-AB	F43
CAT2124SM	SSF-VJ1 5/16-F1/4	F42
CAT214Z34	SSF-VJ1 5/16-UC	F43
CAT21528	SSF-VJ1 5/16-A7	F43
CAT2158	SSF-VJ1 5/16-H1/2-AB	F43
CAT2158SM	SSF-VJ1 5/16-F1/2	F42
CAT216Z34	SSF-VJ1 5/16-UC	F43
CAT21912	SSF-VJ1 5/16-H13/4-AB	F43
CAT21912SM	SSF-VJ1 5/16-F3/4	F42
CAT21AB	SSF-VJ1 5/16-AB	F43
CAT21AF14	SSF-VJ1 5/16-A1/4	F43
CAT21BC	SSF-VJ1 5/16-BC	F42
CAT21BCB	SSF-VJ1 5/16-BC-AB	F42
CAT21SS	SSF-VJ1 5/16C	F42
CAT21VF14	SSF-VJ1 5/16-V1/4	F43
CAT32	SSF-VJ2	F42
CAT32	SSF-VJ2C	F42
CAT3224	SSF-VJ2-H1/4-AB	F43
CAT3224SM	SSF-VJ2-F1/4	F42
CAT324Z34	SSF-VJ2-UC	F43
CAT32528	SSF-VJ2-A7	F43
CAT3258	SSF-VJ2-H1/2-AB	F43
CAT3258SM	SSF-VJ2-F1/2	F42
CAT326Z34	SSF-VJ2-UC	F43
CAT32912	SSF-VJ2-H13/4-AB	F43
CAT32912SM	SSF-VJ2-F3/4	F42
CAT32AB	SSF-VJ2-AB	F43
CAT32AF14	SSF-VJ2-A1/4	F43
CAT32BC	SSF-VJ2-BC	F42
CAT32BCB	SSF-VJ2-BC-AB	F42
CAT32SS	SSF-VJ2	F42
CAT32VF14	SSF-VJ2-V1/4	F43
CATHBA	SSF-VB10	F42
CD0B	6H0-TB	F52
CD0BBP	6H0-TB	F52
CD0BSS	6H0TBSS	N/A
CD1B	6H1-TB	F52
CD1BBP	6H1-TB	F52
CD1BSS	6H1 BSS	N/A
CD2.5B	6H2 1/2-TB	F52
CD2.5BSS	6H2-1/2 BSS	N/A
CD2B	6H2-TB	F52
CD2BSS	6H2 BSS	N/A
CD3B	6H3-TB	F52
CD3BSS	6H3 BSS	N/A
CD4B	6H4-TB	F52
CD4BSS	6H4 BSS	N/A
CD5B	6H5-TB	F52
CD5BSS	6H5 BSS	N/A
CD6B	6H6-B	F52
CD6BSS	6H6 BSS	N/A
CD7B	6H7-B	F52
CD7BSS	6H7 BSS	N/A
CD8B	6H8-B	F52
CD8BSS	6H8BSS	N/A
CD9B	6H9-B	F52
CD9BSS	6H9BSS	N/A
CJ6	SSF-SC6	F26
CM2416M	SSF-CC1-H1/4	F15
CM24812M	SSF-CC1/2 3/4-H1/4	F15
CM24S	SSF-BH1/4S	F5
CM5816M	SSF-CC1-H1/2	F15
CM58812M	SSF-CC1/2 3/4-H1/2	F15
CM58S	SSF-BH1/4S	F5
CM91216M	SSF-CC1-H3/4	F15
CM912812M	SSF-CC1/2 3/4-H3/4	F15
CM912S	SSF-BH1/4S	F5
CNB12P	SSF-CS3/4-FB	F23
CNB812M	SSF-CC1/2 3/4-FB	F23
CNB8P	SSF-CS1/2-FB	F23
CS812	SSF-SS1/2 3/4	F26
CS812D	SSF-SS1/2 3/4D	F26
DH2	SSF-MNH	F50
DSB	820D	F33
DSI2A	820D	F33
DSI2ABP	820D	F33
ESG1	1300	F31
ESG1BP	1300	F31
ESG1M	1300	F31
ET0050HD	EC-1/2	F53
ET0075HD	EC-3/4	F53
ET0100HD	EC-1	F53
ET0125HD	EC-1-1/4	F53
ET0150HD	EC-1-1/2	F53
ET0200HD	EC-2	F53
ET0250HD	EC-2-1/2	F53
ET0300HD	EC-3	F53
FB12P	SSF-SAB-S3/4	F32
FB6M	SSF-SAB-C3/8	F32
FB812M	SSF-SAB-C1/2 3/4	F32
FB8P	SSF-SAB-S1/2	F32
FBS12	7502	F31
FBS16	7502	F31
FBS18	7502	F31
H23	SSF-SH2346	F29
H4	SSF-SH2346	F29
H46TC	SSF-SH2346	F29
H6	SSF-SH2346	F29
HS3	SSF-SHSB	F31
IDS	SSF-TS5/8	F37
IDS1.5	SSF-TS1 1/2	F37
IDS2	SSF-TS2	F37
IDS9	SSF-TS5/8	F37
INC8T5	U 543	N/A
K12	SSF-CK3/4	F17
K12BP	SSF-CK3/4	F17
K16	SSF-CK1	F17
K20	SSF-CK1	F17
K8	SSF-CK1/2	F17
K8BP	SSF-CK1/2	F17
KX	SSF-CK535	F17
KXBP	SSF-CK535	F17
LFC	CI-8930	F40
LFC90	CI-8932	F40
M24	SSF-BH1/4	F5
M24S	SSF-BH1/4S	F5
M58	SSF-BH1/2	F5
M58S	SSF-BH1/2S	F5
M912	SSF-BH3/4	F5
M912S	SSF-BH3/4S	F5
MAC2	SSF-CR2	F21
MAC2123	SSF-CR2-Z2	F21
MAC224	SSF-CR2-H1/4	F21
MAC224SM	SSF-CR2-F1/4	F21
MAC24Z34	SSF-CR2-UC	F21
MAC258	SSF-CR2-H1/2	F21
MAC258SM	SSF-CR2-F1/2	F21
MAC2BC	SSF-CR2-BCV	F21
MAC2T	SSF-CR4	F21
MAC2VF14	SSF-CR2-V1/4	F21
MF250	SSF-SF1/4	F28
MF375	SSF-SF3/8	F28
MF500	SSF-SF1/2	F28
MF625	SSF-SF5/8	F28
MF750	SSF-SF3/4	F28
MFA4I	CM100-1/4	N/A
MFA625	A182-1/4X1	N/A
MFI	SSF-SFT	F28
MFO	SSF-SFO	F28
MFS	SSF-SFA	F28
MP1S	VN1	F32
MP25	VN2	F32
MPLS	WBF-1	F32
MSF	SSF-SMX	F27
MSR24	SSF-HR-F1/4	F12
MSR58	SSF-HR-F1/2	F12
MSR912	SSF-HR-F3/4	F12
MSS24	SSF-HS-F1/4	F12
MSS58	SSF-HS-F1/2	F12
MSS912	SSF-HS-F3/4	F12
NUT0025EG	AB100 1/4	N/A
NUT0031EG	AB100 5/16	N/A
NUT0037EG	AB100 3/8	N/A
NUT0050EG	AB100 1/2	N/A
NUT0062EG	AB100 5/8	N/A
NUT0075EG	AB100 3/4	N/A
PAR0037HD	PC-3/8	F53
PAR0050HD	PC-1/2	F53
PAR0075HD	PC-3/4	F53
PAR0100HD	PC-1	F53
PAR0125HD	PC-1-1/4	F53
PAR0150HD	PC-1-1/2	F53
PAR0200HD	PC-2	F53
PAR0250HD	PC-2-1/2	F53
PAR0300HD	PC-3	F53
PAR0350HD	PC-3-1/2	F53
PAR0400HD	PC-4	F53
PCS1	SSF-CB706	F16
PT16	SSF-T15T5/8	F39
PT16FP	SSF-T15T5/8	F39
RA0037HD	RC-3/8	F53
RA0050HD	RC-1/2	F53
RA0075HD	RC-3/4	F53
RA0100HD	RC-1	F53
RA0125HD	R-1-1/4	F53
RA0150HD	RC-1-1/2	F53
RA0200HD	RC-2-SC	F53
RA0250HD	RC-2-1/2	F53
RA0300HD	RC-3	F53
RA0350HD	RC-3-1/2	F53
RA0400HD	RC-4-SC	F53
RBS16	SSF-SB16	F30
RBS24	SSF-SB24	F30
RGC	3900	F50
RLC	SSF-SR	F33
RLCBP	SSF-SR	F33
S3575BP100	E142-1/4x075EG	F56
S3575DP100	E142-1/4x075EG	F56
SC2A	SSF-CES218	F18
SC2A	SSF-CES281	F18
SC2B	SSF-CES375	F18
SC2C	SSF-CES437	F18
SC2D	SSF-CES562	F18
SC2E	SSF-CES718	F18
SC2F	SSF-CES937	F18
SC2G	SSF-CES1250	F18
SC4A	SSF-CEM218	F18
SC4A	SSF-CEM281	F18
SC4B	SSF-CEM375	F18
SC4C	SSF-CEM437	F18
SC4D	SSF-CEM562	F18
SC4E	SSF-CEM718	F18
SC4F	SSF-CEM937	F18
SC4G	SSF-CEM1250	F18
SC8A	SSF-CEL218	F18
SC8A	SSF-CEL281	F18
SC8B	SSF-CEL375	F18
SC8C	SSF-CEL437	F18
SC8D	SSF-CEL562	F18
SC8E	SSF-CEL718	F18
SC8F	SSF-CEL937	F18
SC8G	SSF-CEL1250	F18
SCH12	CX118-110EG	F54
SCH12B	C118-110EG	N/A
SCH125B	C118-110PG	N/A
SCH16	CX118-125EG	F54
SCH16B	CH118-125EG	F54
SCH20	CX118-135EG	F54
SCH20B	CH118-135EG	F54
SCH24	CX118-175EG	N/A
SCH24B	CH118-175EG	N/A
SCH32B	CH118-205EG	F54
SCH40B	CH118-250EG	F54
SCH48B	CH118-300EG	F54
SCH56B	CH118-375EG	F54
SCH64B	CH118-425EG	F54
SCH6B	CH118-055EG	F54
SCH72B	CH118-475EG	F54
SCH8	CX118-081EG	F54
SCH8B	CH118-081EG	F54
SGB16	SSF-SG1-16	F29
SGB16A	SSF-SG16P	F29
SGB16D	SSF-SG2-16	F29
SGB24	SSF-SG1-24	F29
SGB24A	SSF-SG24P	F29
SGB24D	SSF-SG2-24	F29
SK125I	703-3/4	F55
SK125IBP	703-3/4	F55
SK165I	703-1	F55
SK16ALA	702-1-AL	N/A
SK16SS	702-1-SS	N/A
SK205I	703-1-1/4	F55
SK20ALA	702-1 1/4-AL	N/A
SK20SS	702-1 1/4-SS	N/A
SK245I	703-1-1/2	F55
SK24ALA	702-1 1/2-AL	N/A
SK24SS	702-1 1/2-SS	N/A
SK325I	703-2	F55
SK32ALA	702-2-AL	N/A
SK32SS	702-2-SS	N/A
SK405I	702-2-1/2	F55
SK40ALA	702-2 1/2-AL	N/A
SK40SS	702-2 1/2-SS	N/A
SK485I	702-3	N/A
SK48ALA	702-3-AL	N/A
SK48SS	702-3-SS	N/A
SK565I	702-3 1/2	N/A
SK56ALA	702-3 1/2-AL	N/A
SK56SS	702-3 1/2-SS	N/A
SK645I	702-4	N/A
SK64ALA	702-4-AL	N/A
SK64SS	702-4-SS	N/A
SK85I	703-1/2	F55
SK85IBP	703-1/2	F55
SK8ALA	702-1/2-AL	N/A
SK8SS	702-1/2-SS	N/A
SPRA0025EG	A100 1/4	N/A
SPRA0037EG	A100 3/8	N/A
SPRA0050EG	A100 1/2	N/A
SPRC0025EG	B100 1/4	N/A
SPRC0037EG	B100 3/8	N/A
SPRC0050EG	B100 1/2	N/A
SPRD0025EG	H100 1/4	N/A
SPRD0037EG	H100 3/8	N/A
SPRD0050EG	H100 1/2	N/A
SPRM2508EG	A182 1/4 X 1	N/A
SPRM2511EG	A182 1/4 X 1 1/4	N/A
SPRM3711EG	A184 3/8 X 1	N/A
SPRM3716EG	A184 3/8 X 1 1/4	N/A
SPRM5011EG	A185 1/2 X 1	N/A
SPRM5013EG	A185 1/2 X 1 1/4	N/A
TSGB16	SSF-SG16A	F29
TSGB24	SSF-SG24A	F29
TSNT0025EG	CM100 1/4	N/A
TSNT0037EG	CM100 3/8	N/A
TSNT0050EG	CM100 1/2	N/A
VF14	SSF-BV1/16	F8
VF14	SSF-BV1/4	F8
VF144TI	SSF-BV1/16-A1/4T	N/A
VF146A	SSF-BV1/16-B3/8	F8
VF146T	SSF-BV1/16-A3/8	N/A
VF146TI	SSF-BV1/16-A3/8T	N/A
VF14708	SSF-BV1/16-B1/4	F8
WMX3	SSF-CW3	F19
WMX6	SSF-CW6	F19

F

Steel City®

* Caddy is a registered trademark of Erico, Inc.

Thomas&Betts

© 2002 Thomas & Betts Corporation. Specifications are subject to change without notice.

Steel City®

Cross Reference – Minerallac

MINERALLAC	STEEL CITY	PAGE #
0	6H0	F52
0-B	6H0-B	F52
0-S	6H0-SS	N/A
0-SB	6H0B-SS	N/A
1	6H1	F52
1-B	6H1-B	F52
1-S	6H1-SS	N/A
1-SB	6H1B-SS	N/A
602	BC2-TB	F52
112-KC	SSF-CC1 1/2	F14
112KC-1KC	SSF-CC1-C1 1/2	F20
112-KCT	SSF-CC1 1/2T	F14
114-KC	SSF-CC1 1/4	F14
114KC-1KC	SSF-CC1-C1 1/4	F20
114-KCT	SSF-CC1 1/4T	F14
12-34-KC	SSF-CC1/2 3/4	F14
1234KC-1KC	SSF-CC1-C1/2 3/4	F20
1234KC-1234KC	SSF-CC1/2 3/4-C1/2 3/4	F20
12-34-KCT	SSF-CC1/2 3/4T	F14
14-WNW	SSF-TWN1/4	F39
1-KC	SSF-CC1	F14
1KC-1KC	SSF-CC1-C1	F20
1-KCT	SSF-CC1T	F14
2	6H2	F52
2-B	6H2	F52
2-S	6H2-SS	N/A
2-SB	6H2B-SS	N/A
2-1/2	6H2 1/2	F52
2-1/2-B	6H2 1/2-B	F52
2-1/2-S	6H 2 1/2-SS	N/A
2-1/2-SB	6H 2 1/2B-SS	N/A
2-KC	SSF-CC2	F14
2KC-1KC	SSF-CC1-C2	F20
2-KCT	SSF-CC2T	F14
3	6H3	N/A
3-B	6H3-B	F52
3-S	6H3-SS	N/A
3-SB	6H3B-SS	N/A
38-KC	SSF-CC3/8	F14
38KC-1KC	SSF-CC1-C3/8	F20
38-KCT	SSF-CC3/8T	F14
4	6H4	F52
4-B	6H4-B	F52
4-S	6H4-SS	N/A
4-SB	6H4B-SS	N/A
5	6H5	F52
5-B	6H5-B	F52
5-S	6H5-SS	N/A
5-SB	6H5B-SS	N/A
500	SSF-BBC	F4
500-100	SSF-BBC-S1V	F4
500-100B	SSF-BBC-S1H	F4
500-50	SSF-BBC-S1/2V	F4
500-50B	SSF-BBC-S1/2H	F4
500-75	SSF-BBC-S3/4V	F4
500-75B	SSF-BBC-S3/4H	F4
500KC-1	SSF-BBC-C1V	F4
500KC-1B	SSF-BBC-C1H	F4
500KC-112	SSF-BBC-C1 1/2V	F4
500KC-112B	SSF-BBC-C1 1/2H	F4
500KC-114	SSF-BBC-C1 1/4V	F4
500KC-114B	SSF-BBC-C1 1/4H	F4
500KC-1234	SSF-BBC-C1/2 3/4V	F4
500KC-1234B	SSF-BBC-C1/2 3/4H	F4
500KC-2	SSF-BBC-C2V	F4
500KC-2B	SSF-BBC-C2H	F4
500M	SSF-BBC	F4
6	6H6	F52
6-B	6H6-B	F52
6-S	6H6-SS	N/A
6-SB	6H6B-SS	N/A
600	BC1-TB	F52
600-10	BC1-TB	F52
600-100	SSF-BBC-S1V	F4
600-100B	SSF-BBC-S1H	F4
600-50	SSF-BBC-S1/2V	F4
600-50B	SSF-BBC-S1/2H	F4
600-75	SSF-BBC-S3/4V	F4
600-75B	SSF-BBC-S3/4H	F4
600KC-1	SSF-BBC-C1V	F4
600KC-1-B	SSF-BBC-C1H	F4
600KC-112	SSF-BBC-C1 1/2V	F4
600KC-112-B	SSF-BBC-C1 1/2H	F4
600KC-114	SSF-BBC-C1 1/4V	F4
600KC-114B	SSF-BBC-C1 1/4H	F4
600KC-1234	SSF-BBC-C1/2 3/4V	F4
600KC-1234-B	SSF-BBC-C1/2 3/4H	F4
600KC-2	SSF-BBC-C2V	F4
600KC-2-B	SSF-BBC-C2H	F4
602	BC2-TB	F52
602-B	BC2-TB	F52
634-R	30-00820	N/A
634-RW	30-00819	N/A
646-R	30-00825	N/A
646-RW	30-00812	N/A
646-RXL	30-00825	N/A
648-R	31-00825	N/A
648-RW	31-00810	N/A
654-R	31-00825	N/A
7	6H7	F52
7-B	6H7-B	F52
7-S	6H7-SS	N/A
7-SB	6H7B-SS	N/A
700	500-SC	F52
700-10	509	F52
701	501	F52
702	502	F52
703	503-SC	F52
8	6H8	F52
8-B	6H8-B	F52
8-S	6H8-SS	N/A
8-SB	6H8B-SS	N/A
9	6H9	F52
9-B	6H9-B	F52
9-S	6H9-SS	N/A
9-SB	6H9B-SS	N/A
APS	SSF-CUC	F16
APS-100	SSF-CUC-S1	F16
APS-50	SSF-CUC-S1/2	F16
APS-1-KC	SSF-CUC-C1	F16
APS-12-34-KC	SSF-CUC-C1/2 3/4	F16
APS-75	SSF-CUC-S3/4	F16
APS-KC-1	SSF-CUC-C1	F16
APS-KC-12-34	SSF-CUC-C1/2 3/4	F16
APSM	SSF-CUC	F16
AS-18-100	SSF-CS1-H1/4	F15
AS-18-50	SSF-CS1/2-H1/4	F15
AS-18-75	SSF-CS3/4-H1/4	F15
AS-516-100	SSF-CS1-H1/2	F15
AS-516-50	SSF-CS1/2-H1/2	F15
AS-516-75	SSF-CS3/4-H1/2	F15
AS-916-100	SSF-CS1-H3/4	F15
AS-916-50	SSF-CS1/2-H3/4	F15
AS-916-75	SSF-CS3/4-H3/4	F15
BA	SSF-HAB	F12
BA-12-34-KC	SSF-SAB-C1/2 3/4	F32
BA-38-KC	SSF-SAB-C3/8	F32
BA-50	SSF-SAB-S1/2	F32
BA-75	SSF-SAB-S3/4	F32
BBC	SSF-THC	F36
BC-18	SSF-BH1/4	F5
BC-18-KC-1	SSF-CC1-H1/4	F15
BC-18-KC-112	SSF-CC1 1/2-H1/4	F15
BC-18-KC-114	SSF-CC1 1/4-H1/4	F15
BC-18-KC-1234	SSF-CC1/2 3/4-H1/4	F15
BC-18-KC-2	SSF-CC2-H1/4	F15
BC-18-KC-38	SSF-CC3/8-H1/4	F15
BC-18M	SSF-BH1/4S	F5
BC-18-ST	SSF-BH1/4S	F5
BC-516	SSF-BH1/2	F5
BC-516-KC-1	SSF-CC1-H1/2	F15
BC-516-KC-112	SSF-CC1 1/2-H1/2	F15
BC-516-KC-114	SSF-CC1 1/4-H1/2	F15
BC-516-KC-1234	SSF-CC1/2 3/4-H1/2	F15
BC-516-KC-2	SSF-CC2-H1/2	F15
BC-516-KC-38	SSF-CC3/8-H1/2	F15
BC-516-ST	SSF-BH1/2S	F5
BC-916	SSF-BH3/4	F5
BC-916-KC-1	SSF-CC1-H3/4	F15
BC-916-KC-112	SSF-CC1 1/2-H3/4	F15
BC-916-KC-114	SSF-CC1 1/4-H3/4	F15
BC-916-KC-1234	SSF-CC1/2 3/4-H3/4	F15
BC-916-KC-2	SSF-CC2-H3/4	F15
BC-916-KC-38	SSF-CC3/8-H3/4	F15
BC-916-ST	SSF-BH3/4S	F5
BJ-NP	CP-1	N/A
BMB-16	SSF-SG1-16	F29
BMB-16D	SSF-SG2-16	F29
BMB-24	SSF-SG1-24	F29
BMB-24D	SSF-SG2-24	F29
BO	SSF-HOB	F12
BS	SSF-SX	F27
BS-18	7502	F31
BS-18	7502	F31
BS-18	7502	F31
BST	820D	F33
BXC	SSF-CM535	F19
DWC-1	SSF-TS5/8	F37
DWC-1XL	SSF-TS1 1/2	F37
F-15XR	SSF-CAXL1	F18
F2A	SSF-CES218	F18
F2B	SSF-CES375	F18
F2C	SSF-CES437	F18
F2D	SSF-CES562	F18
F2E	SSF-CES718	F18
F2F	SSF-CES937	F18
F2G	SSF-CES1250	F18
F4A	SSF-CEM218	F18
F4B	SSF-CEM375	F18
F4C	SSF-CEM437	F18
F4D	SSF-CEM562	F18
F4E	SSF-CEM718	F18
F4F	SSF-CEM937	F18
F4G	SSF-CEM1250	F18
F8A	SSF-CEL218	F18
F8B	SSF-CEL375	F18
F8C	SSF-CEL437	F18
F8D	SSF-CEL562	F18
F8E	SSF-CEL718	F18
F8F	SSF-CEL937	F18
F8G	SSF-CEL1250	F18
FBO-23	SSF-SH2346	F29
FBO-23-4	SSF-SH2346	F29
FBO-6	SSF-SH2346	F29
FH-116	SSF-BV1/16	F8
FH-532	SSF-BV1/4	F8
FS-1	SSF-CK1/2	F17
FS-2	SSF-CK3/4	F17
FS-3	SSF-CK1	F17
FS-4	SSF-CK1	F17
FS-BX	SSF-CK535	F17
FT	SSF-TFC	F36
G-100	1300	F31
HI-C-100	SSF-CS1	F14
HI-C-100-100	SSF-CS1-S1	F20
HI-C-100-T	SSF-CS1T	F14
HI-C-50	SSF-CS1/2	F14
HI-C-50-100	SSF-CS1/2-S1	F20
HIC-50-50	SSF-CS1/2-S1/2	F20
HI-C-50-75	SSF-CS1/2-S3/4	F20
HI-C-50-T	SSF-CS1/2T	F14
HI-C-75	SSF-CS3/4	F14
HI-C-75-100	SSF-CS3/4-S1	F20
HI-C-75-75	SSF-CS3/4-S3/4	F20
HI-C-75-T	SSF-CS3/4T	F14
JC-12-100	JC100	N/A
K1B	6H1-TB	F52
K2B	6H2-B	F52
K0B	CH-0 LN	N/A
LS-BAR	SSF-TL24	F36
NB-1234	SSF-CC1/2 3/4-FB	F23
NB-50	SSF-CS1/2-FB	F23
NB-75	SSF-CS3/4-FB	F23
OR	SSF-SR	F33
P	SSF-BZ2	F6
P-100	SSF-BZ2-S1	F7
P-50	SSF-BZ2-S1/2	F7
P-75	SSF-BZ2-S3/4	F7
PH	SSF-BZ1	F6
PH-14	SSF-BZ1-B1/4	F7
PH-143-8N	SSF-BZ1-A3/8	F7
PH-14T	SSF-BZ1-A1/4T	F7
PH-38	SSF-BZ1-B3/8	F7
PH-38T	SSF-BZ1-A3/8T	F7
PKC-1	SSF-BZ2-C1	F7
PKC-114	SSF-BZ2-C1 1/4	F7
PKC-12-34	SSF-BZ2-C1/2 3/4	F7
PKC-38	SSF-BZ2-C3/8	F7
PS	SSF-HS	F12
PSF-18	SSF-HS-F1/4	F12
PSF-18R	SSF-HR-F1/4	F12
PSF-516	SSF-HS-F1/2	F12
PSF-516R	SSF-HR-F1/2	F12
PSF-916	SSF-HS-F3/4	F12
PSF-916R	SSF-HR-F3/4	F12
PSR	SSF-HR	F12
RA-14	SSF-HB8-AB	F10
RA-14T	SSF-H1/4-ABT	N/A
RA-1438N	SSF-HA3/8-AB	F10
RA-38	SSF-HB8-AB	F10
RA-38T	SSF-HA3/8-ABT	F10
R-14	SSF-HB1/4	F12
R-14-38N	SSF-HA3/8	F12
R-14-T	SSF-HA1/4T	F12
R-18-14	SSF-HB1/4-F1/4	F11
R-18-14	SSF-HB8-F1/4	F11
R-18-1438N	SSF-HA3/8-F1/4	F11
R-18-14-T	SSF-HA1/4-F1/4T	F11
R-18-38	SSF-HB3/8-F1/4	F11
R-18-38T	SSF-HA3/8-F1/4T	F11
R-38	SSF-HB3/8	F12
R-38T	SSF-HA3/8T	F12
R-516-14	SSF-HB1/4-F1/2	F11
R-516-1438N	SSF-HA3/8-F1/2	F11
R-516-14-T	SSF-HA1/4-F1/2T	F11
R-516-38	SSF-HB3/8-F1/2	F11
R-516-38T	SSF-HA3/8-F1/2T	F11
R-916-14	SSF-HB8-F3/4	F11
R-916-1438N	SSF-HA3/8-F3/4	F11
R-916-1438N	SSF-HB1/4-F3/4	F11
R-916-14T	SSF-HA1/4-F3/4T	F11
R-916-38	SSF-HB3/8-F3/4	F11
R-916-38T	SSF-HA3/8-F3/4T	F11
RA-14	SSF-HB1/4-AB	F10
RA-1438N	SSF-HA3/8-AB	F10
RA-14-T	SSF-HA1/4-ABT	F10
RA-38	SSF-HB3/8-AB	F10
RA-38T	SSF-HA3/8-ABT	F10
RF-116-1438N	SSF-BV1/16-A3/8	N/A
RF-116-14	SSF-BV1/4-B8	F8
RF-116-14T	SSF-BV1/16-A1/4T	N/A
RF-116-38	SSF-BV1/16-B3/8	F8

F

Steel City®

Thomas&Betts

© 2002 Thomas & Betts Corporation. Specifications are subject to change without notice. www.tnb.com

Steel City®

Cross Reference – Minerallac

MINERALLAC	STEEL CITY	PAGE #
RF-116-38T	SSF-BV1/16-A3/8T	N/A
RF-116-4	SSF-BV1/16-B1/4	F8
RF-532-14	SSF-BV1/16-B8	F8
RF-532-1438N	SSF-BV1/4-A3/8	N/A
RF-532-14T	SSF-BV1/4-A1/4T	N/A
RF-532-38	SSF-BV1/4-B3/8	F8
RF-532-38-T	SSF-BV1/4-A3/8T	N/A
RO-14	SSF-HB1/4-OB	F10
RO-1438N	SSF-HA3/8-OB	F10
RO-14-T	SSF-HA1/4-OBT	F10
RO-38	SSF-HB3/8-OB	F10
RO-38T	SSF-HA3/8-OBT	F10
RS-100	SSF-CS1-OB	F23
RS-1234	SSF-CS1/2-OB	F23
RS-50	SSF-CS1/2-OB	F23
RS-75	SSF-CS3/4-OB	F23
S	SSF-SFT	F28
S-1900	SSF-SMX	F27
SB-100	SSF-SF-S1	F28
SB-12	SSF-SF1/2	F28
SB-14	SSF-SF1/4	F28
SB-34	SSF-SF3/4	F28
SB-38	SSF-SF3/8	F28
SB-50	SSF-SF-S1/2	F28
SB-58	SSF-SF5/8	F28
SB-75	SSF-SF-S3/4	F28
SBC	SSF-SFA	F28
SB-KC-1	SSF-SF-C1	F28
SB-KC-1234	SSF-SF-C1/2 3/4	F28
SB-KC-38	SSF-SF-C3/8	F28
SBC	SSF-SFA	F28
SBO	SSF-SF0	F28
SBS	SS1-TB	F27
SBS-2.5	SS1-TB	F27
SBS-3.5	SS1-TB	F27
SBS-4	SS1-TB	F27
SCT-3	SSF-T15T5/8	F39
SCT-3XL	SSF-T15T2	F39
SCX-1W	SSF-T15T5/8	F39
SCX-1L	SSF-T15T1 1/2	F39
SCX-1XL	SSF-T15T2	F39
SFC-18	SSF-BF1/4	F5
SFC-18-100	SSF-CS1-F1/4	F15
SFC-18-50	SSF-CS1/2-F1/4	F15
SFC-18-75	SSF-CS3/4-F1/4	F15
SFC-18-KC-1	SSF-CC1-F1/4	F15
SFC-18-KC-112	SSF-CC1 1/2-F1/4	F15
SFC-18-KC-114	SSF-CC1 1/4-F1/4	F15
SFC-18-KC-1234	SSF-CC1/2 3/4-F1/4	F15
SFC-18-KC-2	SSF-CC2-F1/4	F15
SFC-18-KC-38	SSF-CC3/8-F1/4	F15
SFC-516	SSF-BF1/2	F5
SFC-516-100	SSF-CS1-F1/2	N/A
SFC-516-50	SSF-CS1/2-F1/2	F15
SFC-516-75	SSF-CS3/4-F1/2	F15
SFC-516-KC-1	SSF-CC1-F1/2	F15
SFC-516-KC-112	SSF-CC1 1/2-F1/2	F15
SFC-516-KC-114	SSF-CC1 1/4-F1/2	F15
SFC-516-KC-1234	SSF-CC1/2 3/4-F1/2	F15
SFC-516-KC-2	SSF-CC2-F1/2	F15
SFC-516-KC-38	SSF-CC3/8-F1/2	F15
SFC-916	SSF-BF3/4	F5
SFC-916-100	SSF-CS1-F3/4	F15
SFC-916-50	SSF-CS1/2-F3/4	F15
SFC-916-75	SSF-CS3/4-F3/4	F15
SFC-916-KC-1	SSF-CC1-F3/4	F15
SFC-916-KC-112	SSF-CC1 1/2-F3/4	F15
SFC-916-KC-114	SSF-CC1 1/4-F3/4	F15
SFC-916-KC-1234	SSF-CC1/2 3/4-F3/4	F15
SFC-916-KC-2	SSF-CC2-F3/4	F15
SFC-916-KC-38	SSF-CC3/8-F3/4	F15
SH-212	SH10	N/A
SS	SSF-SK	F27
SS-100	SSF-SK-S1	F27
SS-12-34	SSF-SK-C1/2 3/4	F27
SS-50	SSF-SK-S1/2	F27
SS-75	SSF-SK-S3/4	F27
SS-KC-1	SSF-SK-C1	F27
ST0B	703-1/2	F55
ST1B	703-3/4	F55
ST2B	703-1	F55
ST3B	703-1-1/4	F55
ST4B	703-1-1/2	F55
ST5B	703-2	F55
ST6B	702-2-1/2	F55
ST7B	702-3	N/A
ST8B	702-3-1/2	N/A
ST9B	702-4	N/A
TB	SSF-TCH	F37
TB-100	SSF-TCH-S1	F37
TB-12-34-KC	SSF-TCH-C1/2 3/4	F37
TB-50	SSF-TCH-S1/2	F37
TB-75	SSF-TCH-S3/4	F37
T-BAR	SSF-TH24	F36
TBT Threaded	SSF-TCHT	F37
TS	SSF-TCV	F37
TS-12-34-KC	SSF-TCV-C1/2 3/4	F37
TS-100	SSF-TCV-S1	F37
TS-50	SSF-TCV-S1/2	F37
TS-75	SSF-TCV-S3/4	F37
TS-KC-12-34	SSF-TCV-C1/2 3/4	F37
TST Threaded	SSF-TCVT	F37
WBF-1	SSF-SLV	F32

* Minerallac is a registered trademark of the Minerallac Company.

© 2002 Thomas & Betts Corporation. Specifications are subject to change without notice.

No assembly required!

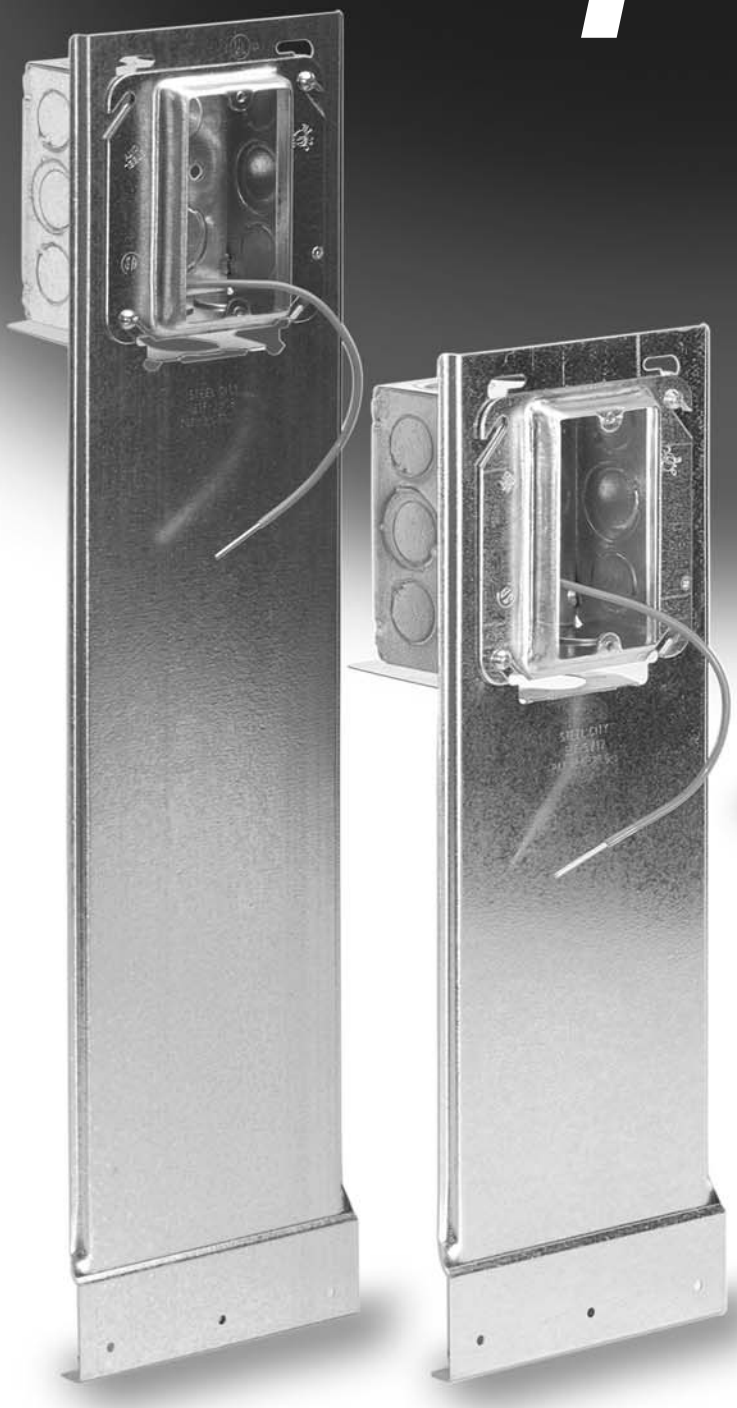

Work faster and more efficiently with Steel City® pre-fabricated box and cover assemblies!



Assembling electrical boxes on the job is time consuming. Steel City pre-fabricated box and cover assemblies free up your electricians for value added work.

With 48 combinations of popular boxes, brackets and covers, you can speed installations and assure absolute uniformity throughout the job. Choose from 1 1/2" and 2 1/8" deep boxes with 10 1/2" insulated pigtails and a wide range of brackets and covers.

Steel City: We'll build the boxes—so you can build your business. To find a Thomas & Betts authorized distributor, go to www.TNB.com, click on T&B Electrical World and access the distributor locator. Or for technical services, please call **1-888-862-3289**.

Steel City® • Red•Dot® • Superstrut® • Bowers® • Union®

Thomas&Betts